



DUCATO

MORE THAN WORK

GOODS TRANSPORT



Trim levels of models and options may vary due to specific market or legal requirements. The data, descriptions and illustrations contained in this brochure are for illustrative purposes and are valid at the date of publication (11/2019). Some equipment described and/or illustrated in this brochure is optional. Refer to the price list for full information. FCA may change the models described in this brochure at any time for technical or commercial reasons.
Fiat Marketing 00.0.0000.08 - 5 - 11/2019 - Printed in Italy - XX.
Printed on chlorine-free paper.

Edition: November 2019.

www.fiatprofessional.com

TECHNICAL SPECIFICATIONS



PANEL VAN - GLAZED/HALF GLAZED VAN - CREW CAB

Wheelbase 3000		
Panel Van (8,0 m³ - 9,5 m³) GVW 2,8t - 3,0t, 3,3t - 3,5t page 6	Glazed Van (8,0 m³ - 9,5 m³) GVW 3,3t, 3,5t page 8	Crew Cab (5,5 m³) GVW 3,3t - 3,5t page 20
Maxi Panel Van (8,0 m³) GVW 3,5t - 4,0t - 4,25t page 7	-	-

Wheelbase 3450		
Panel Van (10,0 m³ - 11,5 m³) GVW 3,0t - 3,3t - 3,5t page 9	Glazed Van (10,0 m³ - 11,5 m³) GVW 3,3t - 3,5t page 10	Crew Cab (8,0 m³) GVW 3,3t - 3,5t pages 20-21
Maxi Panel Van (10,0 m³ - 11,5 m³) GVW 3,5t - 4,0t - 4,25t page 11	Maxi Glazed Van (11,5 m³) GVW 3,5t - 4,0t - 4,25t page 12	Maxi Crew Cab (8,0 m³) GVW 3,5t pages 20-21

Wheelbase 4035		
Panel Van (13,0 m³ - 15,0 m³) GVW 3,3t - 3,5t page 13	Glazed Van (13,0 m³ - 15,0 m³) GVW 3,3t - 3,5t page 14	-
Maxi Panel Van (13,0 m³ - 15,0 m³) GVW 3,5 - 4,0t - 4,25t page 16	Maxi Glazed Van (13,0 m³ - 15,0 m³) GVW 3,5t - 4,0t - 4,25t page 15	Maxi Crew Cab (10,5 m³) GVW 3,5t pages 20-21

Wheelbase 4035 XL		
Panel Van (15,0 m³ - 17,0 m³) GVW 3,5t page 17	-	-
Maxi Panel Van (15,0 m³ - 17,0 m³) GVW 3,5t - 4,0t - 4,17t page 18	Maxi Glazed Van (15,0 m³) GVW 3,5t - 4,0t - 4,17t page 19	

TRUCK - CREW CAB TRUCK - TIPPER - CREW CAB TIPPER

Wheelbase 3000			
Truck GVW 3,2t - 3,32t page 22 (aluminium panels) page 29 (steel panels)	-	Tipper GVW 3,2t - 3,32t page 34 (three - way) page 39 (one - way)	-
Maxi Truck GVW 3,5t page 24 (aluminium panels) page 30 (steel panels)	-	-	-

Wheelbase 3450			
Truck GVW 3,3t - 3,43t page 22 (aluminium panels) page 29 (steel panels)	Crew Cab Truck GVW 3,25t - 3,32t page 26 (aluminium panels) page 32 (steel panels)	Tipper GVW 3,3t - 3,43t page 34 (three - way) page 39 (one - way)	-
Maxi Truck GVW 3,5t - 3,92t page 24 (aluminium panels) page 30 (steel panels)	Maxi Crew Cab Truck GVW 3,5t - 3,76t page 27 (aluminium panels) page 33 (steel panels)	Maxi Tipper GVW 3,5t - 3,92t page 36 (three - way) page 41 (one - way)	-

Wheelbase 3800			
Truck GVW 3,3t - 3,5t page 22 (aluminium panels) page 29 (steel panels)	-	Tipper GVW 3,3t - 3,5t page 34 (three - way) page 39 (one - way)	-
Maxi Truck GVW 3,5t - 4,0t - 4,1t page 24 (aluminium panels) page 30 (steel panels)	-	Maxi Tipper GVW 3,5t - 4,0t - 4,17t page 36 (three - way) page 41 (one - way)	-

Wheelbase 4035			
Truck GVW 3,3t - 3,5t page 23 (aluminium panels) page 29 (steel panels)	Crew Cab Truck GVW 3,3t - 3,5t page 26 (aluminium panels) page 32 (steel panels)	Tipper GVW 3,3t - 3,5t page 35 (three - way) page 40 (one - way)	Crew Cab Tipper GVW 3,5t page 37 (three - way)
Maxi Truck GVW 3,5t - 4,0t - 4,1t page 25 (aluminium panels) page 31 (steel panels)	Maxi Crew Cab Truck GVW 3,5t - 3,92t - 4,17t page 27 (aluminium panels) page 33 (steel panels)	Maxi Tipper GVW 3,5t - 4,0t - 4,17t page 36 (three - way) page 41 (one - way)	Maxi Crew Cab Tipper GVW 3,5t - 3,92t page 38 (three - way) page 42 (one - way)

Wheelbase 4035 XL			
Truck GVW 3,5t page 22 (aluminium panels) page 28 (steel panels)	-	-	-
Maxi Truck GVW 3,5t - 3,97t page 25 (aluminium panels) page 31 (steel panels)	Maxi Crew Cab Truck GVW 3,5t - 3,86t page 27 (aluminium panels) page 33 (steel panels)	-	Maxi Crew Cab Tipper GVW 3,5t - 3,86 - 4,15t page 38 (three - way) page 42 (one - way)

GENERAL NOTES & CO₂ INFORMATION

All data (e.g. kerb weight, payload, fuel consumption, CO₂ emissions etc.) are referred to standard version with manual gearbox and without optional equipment.

Payload data include driver's weight.

The CO₂ and fuel consumption values indicated are determined on the basis of the measurement / correlation method referring to the NEDC cycle as per Regulation (EU) 2017/1152-1153.

The CO₂ and fuel consumption values are hereby indicated as to allow the comparison of vehicle data.

The homologation values of CO₂ and fuel consumption may not reflect the actual values of CO₂ and fuel consumption, which depend on many factors related, by way of example but not limitation, to the driving style, the route, the weather and road conditions, the condition, use and equipment of the vehicle.

The indicated value of CO₂ and fuel consumption refers to the versions of the vehicle with the highest and the lowest values. Those values may change with the subsequent configuration depending on equipment selected and/or size of tires selected.

The indicated values of CO₂ and fuel consumption are not definitive and may evolve as a result of changes in the production cycle; more up-to-date values will be available at the selected official dealer of the FCA network.

In any case, the official values of CO₂ and fuel consumption of the vehicle purchased by the customer will be provided with the documents accompanying the vehicle.

In cases where the values of CO₂ and fuel consumption are relevant for the purposes of calculating taxes and duties related to the vehicle, reference should be made to the applicable laws in each country.

Vehicles type-approved in category N2 are limited to 90 km/h.


TECHNICAL SPECIFICATIONS

DUCATO VAN - GLAZED AND HALF-GLAZED VAN - CREW CAB - TRUCK

Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂ Power	180 MultiJet ₂ Power	140 Natural Power			
No. of cylinders, layout	4, in line	4, in line	4, in line	4, in line	4, in line			
Displacement (cm³)	2287	2287	2287	2287	2999			
Compression ratio	16.2:1	16.2:1	16.2:1	16.2:1	12.5:1			
EC max. power: kW (HP) rpm	88 (120) / 3600	104 (140) / 3600	117 (160) / 3500	130 (177) / 3500	100 (136) / 3500			
EC max torque: Nm (kgm) rpm	320 / 1400	350 / 1400 - (350 / 1400 with AT9)	380 / 1500 - (400 / 1500 with AT9)	400 / 1500 - (450 / 1500 with AT9)	350 / 1500			
Emission standard level	Euro 6d-Temp	Euro 6d-Temp	Euro 6d-Temp	Euro 6d-Temp	Euro VI step D			
Timing system (control)	DOHC (toothed belt)	DOHC (toothed belt)	DOHC (toothed belt)	DOHC (toothed belt)	DOHC (chain)			
Supply	electronically controlled Common Rail MultiJet, direct injection with variable geometry turbocharger and intercooler	electronically controlled Common Rail MultiJet, direct injection with variable geometry turbocharger and intercooler	electronically controlled Common Rail MultiJet, direct injection with variable geometry turbocharger and intercooler	electronically controlled Common Rail MultiJet, direct injection with variable geometry turbocharger and intercooler	electronic sequential phased MPI injection with bi-fuel system and specific injectors for methane and petrol with turbocharger and intercooler			
Ignition	by compression	by compression	by compression	by compression	electronic, static integrated			
Transmission								
Drive	front	front	front	front	front			
Clutch	dry single plate with hydraulic release device	dry single plate with hydraulic release device	torque converter	dry single plate with hydraulic release device	torque converter			
Gearbox: no. of gears	manual 6 + R	manual 6 + R	AT 9+R with electronic electro-hydraulic control system	manual 6 + R	AT 9+R with electronic electro-hydraulic control system			
Gearbox ratios	Manual	Manual	Manual MAXI	Automatic	Manual / Manual MAXI			
Reduction ratios	1 st	1:3.727	1:3.727	1:4.71	1:4.273	1:4.273	1:4.71	1:4.167
	2 nd	1:1.952	1:1.952	1:2.84	1:2.474	1:2.474	1:2.84	1:2.350
	3 rd	1:1.290	1:1.290	1:1.91	1:1.462	1:1.462	1:1.91	1:1.462
	4 th	1:0.875	1:0.875	1:1.38	1:1.047	1:0.955	1:1.38	1:1.047
	5 th	1:0.673	1:0.673	1:1	1:0.786	1:0.695	1:1	1:0.786
	6 th	1:0.585	1:0.585	1:0.81	1:0.625	1:0.552	1:0.81	1:0.625
	7 th	–	–	1:0.70	–	–	1:0.70	–
	8 th	–	–	1:0.58	–	–	1:0.58	–
	9 th	–	–	1:0.48	–	–	1:0.48	–
	R	1:3.154	1:3.154	1:3.83	1:4.182	1:4.182	1:3.83	1:4.083
Final drive ratio	1:4.933	1:4.933	1:5.231	1:4.585	1:4.222	1:4.867	1:4.585	1:4.563
Steering								
Type	rack and pinion with power-assisted steering (opt. rack and pinion with variable power-assisted steering - Servotronic)	rack and pinion with power-assisted steering (opt. rack and pinion with variable power-assisted steering - Servotronic)	rack and pinion with power-assisted steering (opt. rack and pinion with variable power-assisted steering - Servotronic)	rack and pinion with power-assisted steering (opt. rack and pinion with variable power-assisted steering - Servotronic)	rack and pinion with variable power-assisted steering (Servotronic)	rack and pinion with variable power-assisted steering (Servotronic)		
Turning circle (kerb-to-kerb)	Short wheelbase 11.1 m – Medium wheelbase 12.5 m –			Medium-long wheelbase 13.6 m – Long wheelbase 14.3 m – Extralong wheelbase 15.3 m				
Braking system - D (disc)								
Type	dual H-I circuit; front and rear disc brakes.			ABS and electronic brake force distribution (EBD)				
Front: Ø mm	30q: 280x24 self-ventilating 33q-35q: 280x28 self-ventilating	30q: 280x24 self-ventilating 33q-35q: 280x28 self-ventilating MAXI 35q-40q: 300x32 self-ventilating	30q: 280x28 self-ventilating 33q-35q-MAXI 35q-40q: 300x32 self-ventilating	30q: 280x24 self-ventilating 33q-35q: 280x28 self-ventilating MAXI 35q-40q: 300x32 self-ventilating	30q: 280x28 self-ventilating 33q-35q-MAXI 35q-40q: 300x32 self-ventilating	30q: 280x28 self-ventilating 33q-35q-MAXI 35q-40q: 300x32 self-ventilating	35q: 280x28 self-ventilating MAXI 35q-40q: 300x32 self-ventilating	
Rear: Ø mm	30q-33q-35q: 280x16	30q-33q-35q-MAXI 35q: 280x16 MAXI 40q (opt on MAXI 35): 300x22	30q-33q-35q: 280x16 MAXI 35q-40q: 300x22	30q-33q-35q-MAXI 35q: 280x16 MAXI 40q (opt on MAXI 35): 300x22	30q-33q-35q: 280x16 MAXI 35q-40q: 300x22	30q-33q-35q: 280x16 MAXI 35q-40q: 300x22	35q-MAXI 35q: 280x16 MAXI 40q (opt on MAXI 35): 300x22	
Brake servo: Ø	11"	30q-33q-35q-MAXI 35q: 11" MAXI 40 q (opt on MAXI 35) 10" + 10"	30q-33q-35q: 11" MAXI 35q-40q: 10" + 10"	30q-33q-35q-MAXI 35q: 11" MAXI 40q (opt on MAXI 35) 10" + 10"	30q-33q-35q: 11" MAXI 35q-40q: 10" + 10"	30q-33q-35q-MAXI 35q: 11" MAXI 40 q (opt on MAXI 35) 10" + 10"	35q-MAXI 35q: 11" MAXI 40 q (opt on MAXI 35) 10" + 10"	
Suspension								
Front	independent, MacPherson type with wishbones, coil springs,			telescopic shock absorbers and anti-roll bar				
Rear	rigid tubular axle with parabolic longitudinal leaf springs,			telescopic shock absorbers and flexible side buffers				
Maximum permitted weight on front axle (kg)	28 q and 30 q: 1630 kg – 33 q: 1750 kg – 35 q: 1850 kg	30 q: 1630 kg – 33 q: 1750 kg – 35 q: 1850 kg MAXI: 2100 kg	30 q: 1630 kg – 33 q: 1750 kg 35 q: 1850 kg MAXI: 2100 kg	30 q: 1630 kg – 33 q: 1750 kg 35 q: 1850 kg MAXI: 2100 kg	30 q: 1630 kg – 33 q: 1750-1800 kg 35 q: 1850 kg MAXI: 2100 kg	35 q medium wheelbase: 1850 kg – 35 q long wheelbase: 2100 kg MAXI: 2100 kg		
Maximum permitted weight on rear axle (kg)	28 q and 30 q: 1650 kg – 33 q: 1900 kg – 35 q: 2000 kg	30 q: 1650 kg – 33 q: 1900 kg – 35 q: 2000 kg MAXI: 2400 kg-2500 kg*	30 q: 1650 kg – 33 q: 1900 kg – 35 q: 2000 kg MAXI: 2400 kg-2500 kg*	30 q: 1650 kg – 33 q: 1900 kg – 35 q: 2000 kg MAXI: 2400 kg-2500 kg*	30 q: 1650 kg – 33 q: 1900 kg – 35 q: 2000 kg MAXI: 2400 kg-2500 kg*	35 q medium wheelbase: 2000 kg – 35 q long wheelbase: 2400 kg MAXI: 2400 kg-2500 kg*		
Wheels								
Tyres	Manual: 215/70 R 15 C (225/70 R 15 C, 215/75 R 16 C, 225/75 R 16 C optional) – MAXI: 215/75 R 16 C on 35 q - 225/75 R 16 C on 40 q			(opt. on 35 MAXI) – Automatic: 30q: 215/70 R 15 C (225/70 R 15 C optional) – 33q-35q-MAXI 35q-40q: 215/75 R 16 C on 35 q - 225/75 R 16 C on 40 q (opt. on 35 MAXI)				
Electrical system (12V)								
Battery capacity (Ah)	105 Ah	105 Ah	105 Ah	105 Ah	110 Ah			
Alternator (A)	High Efficiency Alternator 200A LIN	High Efficiency Alternator 200A LIN	High Efficiency Alternator 200A LIN	High Efficiency Alternator 200A LIN	180 A			
Stop & Start System	standard	standard	standard	standard	not available			
Weights - Capacities								
Max. towable weight (braked) (kg)	2000	2250 - 3000**	2100 - 3000**	2100 - 3000**	2250 - 3000**			
Fuel tank capacity (litres)	75 (opt. 60 or 90)	75 (opt. 60 or 90)	75 (opt. 60 or 90)	75 (opt. 60 or 90)	220 CNG (36 kg) - 15 petrol (recovery)			
AdBlue fuel tank capacity (litres)	19	19	19	19	–			

* with opt. oversized rear suspension **MAXI 35 q ▲ Minimum and maximum values according to model and version

VAN WHEELBASE 3000 MM

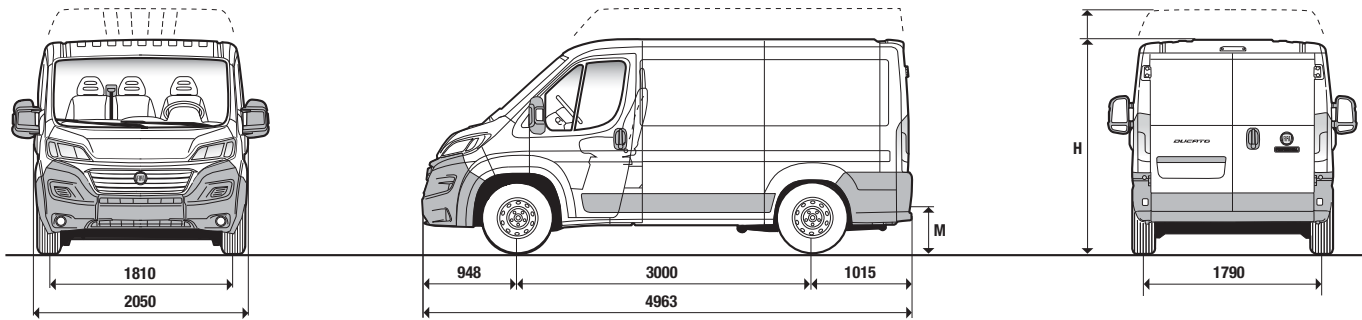

Dimensions mm	Van 28	Van 30		Van 33		Van 35	
		Standard	High	Standard	High	Standard	High
Wheelbase	3000	3000	3000	3000	3000	3000	3000
Maximum length	4963	4963	4963	4963	4963	4963	4963
Maximum width	2050	2050	2050	2050	2050	2050	2050
Front track	1810	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790	1790
H Maximum height (unladen)	2254	2254	2522	2254	2522	2254	2522
Front overhang	948	948	948	948	948	948	948
Rear overhang	1015	1015	1015	1015	1015	1015	1015
Rear door							
Width	1562	1562	1562	1562	1562	1 562	1562
Height	1520	1520	1790	1520	1790	1 520	1790
Side door							
Width	1075	1075	1075	1075	1075	1 075	1075
Height	1485	1485	1485	1485	1485	1 485	1485
Load compartment							
Maximum length	2670	2670	2670	2670	2670	2 670	2670
Maximum width	1870	1870	1870	1870	1870	1 870	1870
Width between wheel arches	1422	1422	1422	1422	1422	1 422	1422
Maximum height	1662	1662	1932	1662	1932	1 662	1932
M Load threshold height (unladen)	535	535	535	535	535	535	535

Volume 8 m³	Van 28	Van 30				Van 33				Van 35			
Model version	290.SL4	290.0L4	290.0L5	290.0L6	290.0L7	290.4L4	290.4L5	290.4L6	290.4L7	290.9L4	290.9L5	290.9L6	290.9L7
Engine	120 MultiJet₂	120 MultiJet₂	140 MultiJet₂	160 MultiJet₂	180 MultiJet₂	120 MultiJet₂	140 MultiJet₂	160 MultiJet₂	180 MultiJet₂	120 MultiJet₂	140 MultiJet₂	160 MultiJet₂	180 MultiJet₂
Kerb weight (kg)	1895	1895	1895	1910	1910	1895	1895	1910	1910	1895	1895	1910	1910
Payload (kg)	905	1105	1105	1090	1090	1405	1405	1390	1390	1605	1605	1590	1590
GVW (kg)	2800	3000	3000	3000	3000	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (km/h)	148	148	156	163	170	148	156	163	170	148	156	163	170
NEDC fuel cons. (l/100 km)	6.5-6.8	6.5-6.8	6.5-6.8	6.7-6.9	6.7-6.9	6.5-6.8	6.5-6.8	6.7-6.9	6.7-6.9	6.5-6.8	6.5-6.8	6.7-6.9	6.7-6.9
NEDC CO₂ emissions (g/km)	173-179	173-179	173-179	178-184	178-184	172-179	173-179	178-184	178-184	172-179	172-179	178-184	178-184
NEDC fuel cons. (l/100 km) - 9 Speed			7.7-7.9	7.7-7.9	7.7-7.9		7.7-7.9	7.7-7.9	7.7-7.9		7.7-7.9	7.7-7.9	7.7-7.9
NEDC CO₂ emissions (g/km) - 9 Speed			204-210	204-210	204-210		204-210	204-210	204-210		204-210	204-210	204-210

Volume 9.5 m³	Van 30 High				Van 33 High				Van 35 High			
Model version	290.0G4	290.0G5	290.0G6	290.0G7	290.4G4	290.4G5	290.4G6	290.4G7	290.9G4	290.9G5	290.9G6	290.9G7
Engine	120 MultiJet₂	140 MultiJet₂	160 MultiJet₂	180 MultiJet₂	120 MultiJet₂	140 MultiJet₂	160 MultiJet₂	180 MultiJet₂	120 MultiJet₂	140 MultiJet₂	160 MultiJet₂	180 MultiJet₂
Kerb weight (kg)	1925	1925	1940	1940	1925	1925	1940	1940	1925	1925	1940	1940
Payload (kg)	1075	1075	1060	1060	1375	1375	1360	1360	1575	1575	1560	1560
GVW (kg)	3000	3000	3000	3000	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (km/h)	143	153	159	165	143	153	159	165	143	153	159	165
NEDC fuel cons. (l/100 km)	6.8-7	6.8-7	7-7.2	7-7.2	6.8-7	6.8-7	7-7.2	7-7.2	6.8-7	6.8-7	7-7.2	7-7.2
NEDC CO₂ emissions (g/km)	180-186	180-186	185-191	185-191	179-186	180-186	185-191	185-191	179-186	179-186	184-191	184-191
NEDC fuel cons. (l/100 km) - 9 Speed		8.0-8.2	8.0-8.2	8.0-8.2		8.0-8.2	8.0-8.2	8.0-8.2		8.0-8.2	8.0-8.2	8.0-8.2
NEDC CO₂ emissions (g/km) - 9 Speed		211-217	211-217	211-217		211-217	211-217	211-217		211-217	211-217	211-217


MAXI VAN WHEELBASE 3000 MM

Dimensions mm	Van Maxi 35 Standard	Van Maxi 40 Standard
Wheelbase	3000	3000
Maximum length	4963	4963
Maximum width	2050	2050
Front track	1810	1810
Rear track	1790	1790
H Maximum height (unladen)	2269	2269
Front overhang	948	948
Rear overhang	1015	1015
Rear door		
Width	1562	1562
Height	1520	1520
Side door		
Width	1075	1075
Height	1485	1485
Load compartment		
Maximum length	2670	2670
Maximum width	1870	1870
Width between wheel arches	1422	1422
Maximum height	1662	1662
M Load threshold height (unladen)	550	550

Volume 8 m³	Van 35 Maxi			Van 40 Maxi		
Model version	295.9L5	295.9L6	295.9L7	295.EL5 ***	295.EL6	295.EL7
Engine	140 MultiJet₂	160 MultiJet₂	180 MultiJet₂	140 MultiJet₂	160 MultiJet₂	180 MultiJet₂
Kerb weight (kg)	1935	1950	1950	1995	1995	1995
Payload (kg)	1565	1550	1550	2010	2125	2125
GVW (kg)	3500	3500	3500	4005 ****	4120 *+**	4120 *+**
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	6.6-6.8	6.8-7.1	6.8-7.1	-	-	-
NEDC CO₂ emissions (g/km)	174-180	179-186	179-186	-	-	-
NEDC fuel cons. (l/100 km) - 9 Speed	7.7-8	7.7-8	7.7-8	-	-	-
NEDC CO₂ emissions (g/km) - 9 Speed	205-212	205-212	205-212	-	-	-

Note: NEDC values for emission and consumption not requested for N2 homologated vehicles
* with 3 seats configuration (opt. 293): GVW 4160 kg on 160 hp and 180 hp
** GVW 4250 kg with opt 7MB (Incomplete vehicle homologation, needed second stage homologation)
*** AT9 gearbox standard. Manual gearbox only with opt 7MB (Incomplete homologation) and opt 1AX (Automatic Gearbox and Smart Tachograph Exclusion)
**** GVW 4250 kg with opt 48D (Oversized GVW 4250 kg) linked to opt 7MB (Incomplete vehicle homologation)

GLAZED/HALF-GLAZED VAN WHEELBASE 3000 MM

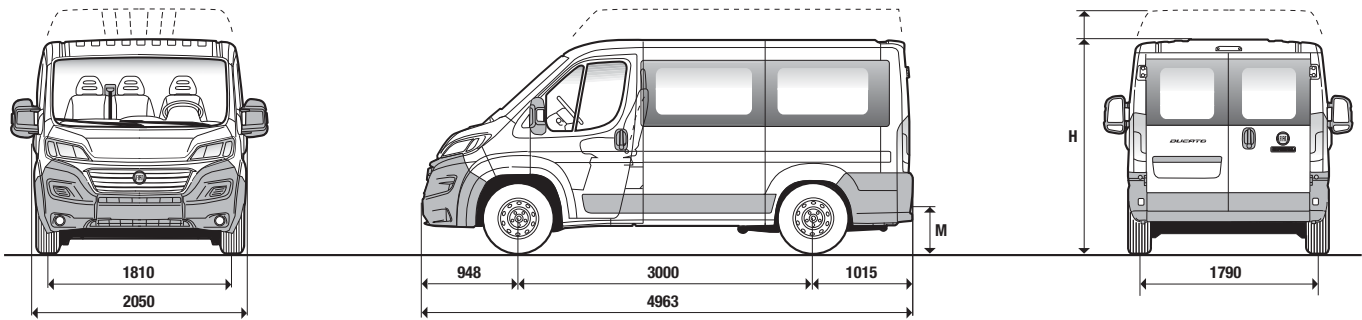


Dimensions mm	Van 33		Van 35	
	Standard	High	Standard	High
Wheelbase	3000	3000	3000	3000
Maximum length	4963	4963	4963	4963
Maximum width	2050	2050	2050	2050
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
H Maximum height (unladen)	2254	2524	2254	2524
Front overhang	948	948	948	948
Rear overhang	1015	1015	1015	1015
Rear door				
Width	1562	1562	1562	1562
Height	1520	1790	1520	1790
Side door				
Width	1075	1075	1075	1075
Height	1485	1485	1485	1485
Load compartment				
Maximum length	2670	2670	2670	2670
Maximum width	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422
Maximum height	1662	1932	1662	1932
M Load threshold height (unladen)	535	535	535	535

Volume 8 m ³	Van 33				Van 35			
Model version	290.4V4 / 290.4W4	290.4V5 / 290.4W5	290.4V6 / 290.4W6	290.4V7 / 290.4W7	290.9V4 / 290.9W4	290.9V5 / 290.9W5	290.9V6 / 290.9W6	290.9V7 / 290.9W7
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	1895	1895	1910	1910	1895	1895	1910	1910
Payload (kg)	1405	1405	1390	1390	1605	1605	1590	1590
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (km/h)	148	156	163	170	148	156	163	170
NEDC fuel cons. (l/100 km)	6.5-6.9	6.5-6.9	6.7-7.1	6.7-7.1	6.5-6.9	6.5-6.9	6.7-7.1	6.7-7.1
NEDC CO ₂ emissions (g/km)	172-183	173-183	178-188	178-188	172-183	172-183	178-188	178-188
NEDC fuel cons. (l/100 km) - 9 Speed		7.7-8.1	7.7-8.1	7.7-8.1		7.7-8.1	7.7-8.1	7.7-8.1
NEDC CO ₂ emissions (g/km) - 9 Speed		204-215	204-215	204-215		204-215	204-215	204-215

Volume 9.5 m ³	Van 33 High				Van 35 High			
Model version	290.4H4 / 290.4X4	290.4H5 / 290.4X5	290.4H6 / 290.4X6	290.4H7 / 290.4X7	290.9H4 / 290.9X4	290.9H5 / 290.9X5	290.9H6 / 290.9X6	290.9H7 / 290.9X7
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	1925	1925	1940	1940	1925	1925	1940	1940
Payload (kg)	1375	1375	1360	1360	1575	1575	1560	1560
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (km/h)	143	153	159	165	143	153	159	165
NEDC fuel cons. (l/100 km)	6.8-7	6.8-7	7-7.2	7-7.2	6.8-7	6.8-7	7-7.2	7-7.2
NEDC CO ₂ emissions (g/km)	179-186	180-186	185-191	185-191	179-186	179-186	184-191	184-191
NEDC fuel cons. (l/100 km) - 9 Speed		8.0-8.2	8.0-8.2	8.0-8.2		8.0-8.2	8.0-8.2	8.0-8.2
NEDC CO ₂ emissions (g/km) - 9 Speed		211-217	211-217	211-217		211-217	211-217	211-217

VAN WHEELBASE 3450 MM

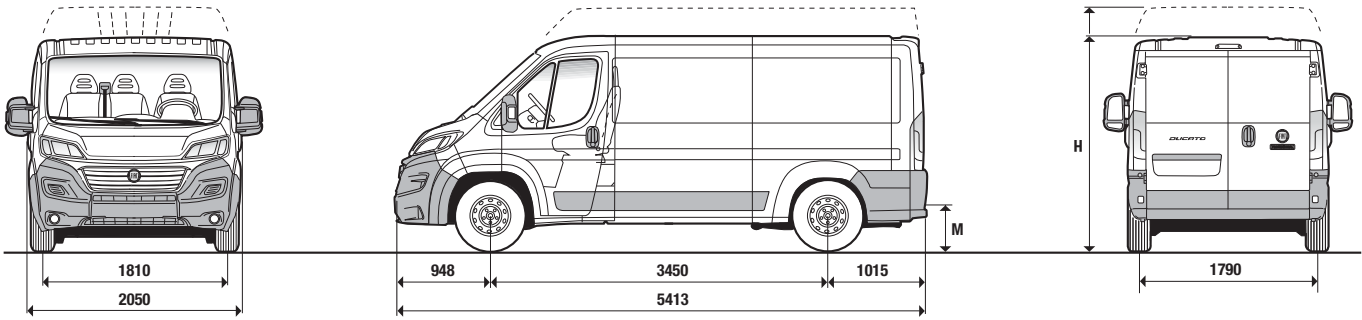


Dimensions mm	Van 30		Van 33		Van 35	
	Standard	High	Standard	High	Standard	High
Wheelbase	3450	3450	3450	3450	3450	3450
Maximum length	5413	5413	5413	5413	5413	5413
Maximum width	2050	2050	2050	2050	2050	2050
Front track	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790
H Maximum height (unladen)	2254	2524	2254	2524	2254	2524
Front overhang	948	948	948	948	948	948
Rear overhang	1015	1015	1015	1015	1015	1015
Rear door						
Width	1562	1562	1562	1562	1562	1562
Height	1520	1790	1520	1790	1520	1790
Side door						
Width	1250	1250	1250	1250	1250	1250
Height	1485	1755	1485	1755	1485	1755
Load compartment						
Maximum length	3120	3120	3120	3120	3120	3120
Maximum width	1870	1870	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422	1422	1422
Maximum height	1662	1932	1662	1932	1662	1932
M Load threshold height (unladen)	535	535	535	535	535	535

Volume 10 m ³	Van 30				Van 33				Van 35				
Model version	290.1L4	290.1L5	290.1L6	290.1L7	290.5L4	290.5L5	290.5L6	290.5L7	290.AL4	290.AL5	290.AL6	290.AL7	290.ALN
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power
Kerb weight (kg)	1935	1935	1950	1950	1935	1935	1950	1950	1935	1935	1950	1950	2310
Payload (kg)	1065	1065	1050	1050	1365	1365	1350	1350	1565	1565	1550	1550	1190
GVW (kg)	3000	3000	3000	3000	3300	3300	3300	3300	3500	3500	3500	3500	3500
Top speed (km/h)	148	156	163	170	148	156	163	170	148	156	163	170	159
NEDC fuel cons. (l/100 km)	6.6-6.8	6.6-6.8	6.7-7	6.7-7	6.5-6.8	6.6-6.8	6.7-7	6.7-7	6.5-6.8	6.5-6.8	6.7-7	6.7-7	12.4-12.7*
NEDC CO ₂ emissions (g/km)	173-179	173-179	178-185	178-185	173-179	173-179	178-184	178-184	173-179	173-179	178-184	178-184	223-228
NEDC fuel cons. (l/100 km) - 9 Speed		7.7-7.9	7.7-7.9	7.7-7.9		7.7-8	7.7-8	7.7-8		7.7-8	7.7-8	7.7-8	
NEDC CO ₂ emissions (g/km) - 9 Speed		205-210	205-210	205-210		205-211	205-211	205-211		205-211	205-211	205-211	

Volume 11.5 m ³	Van 30 High				Van 33 High				Van 35 High				
Model version	290.1G4	290.1G5	290.1G6	290.1G7	290.5G4	290.5G5	290.5G6	290.5G7	290.AG4	290.AG5	290.AG6	290.AG7	290.AGN
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power
Kerb weight (kg)	1960	1960	1975	1975	1960	1960	1975	1975	1960	1960	1975	1975	2335
Payload (kg)	1040	1040	1025	1025	1340	1340	1325	1325	1540	1540	1525	1525	1165
GVW (kg)	3000	3000	3000	3000	3300	3300	3300	3300	3500	3500	3500	3500	3500
Top speed (km/h)	143	153	159	165	143	153	159	165	143	153	159	165	155
NEDC fuel cons. (l/100 km)	6.8-7	6.8-7.1	7-7.2	7-7.2	6.8-7	6.8-7.1	7-7.2	7-7.2	6.8-7	6.8-7.1	7-7.2	7-7.2	12.7-13*
NEDC CO ₂ emissions (g/km)	180-186	180-187	185-192	185-192	180-186	180-187	185-191	185-191	180-186	180-186	185-191	185-191	227-232
NEDC fuel cons. (l/100 km) - 9 Speed		8.0-8.2	8.0-8.2	8.0-8.2		8.1-8.2	8.1-8.2	8.1-8.2		8.1-8.2	8.1-8.2	8.1-8.2	
NEDC CO ₂ emissions (g/km) - 9 Speed		211-217	211-217	211-217		213-217	214-217	214-217		213-216	213-217	213-217	

* Fuel consumption (m³/100 km)

GLAZED/HALF-GLAZED VAN WHEELBASE 3450 MM

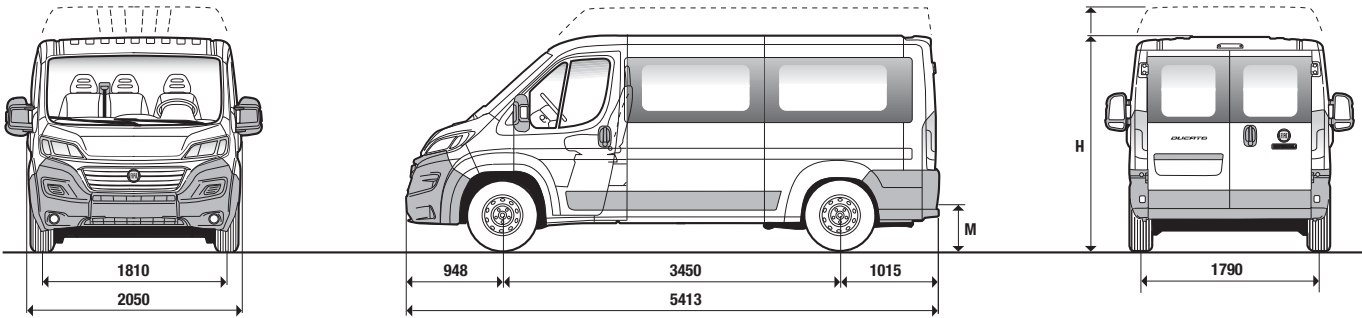


Dimensions mm	Van 33		Van 35	
	Standard	High	Standard	High
Wheelbase	3450	3450	3450	3450
Maximum length	5413	5413	5413	5413
Maximum width	2050	2050	2050	2050
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
H Maximum height (unladen)	2254	2524	2254	2524
Front overhang	948	948	948	948
Rear overhang	1015	1015	1015	1015
Rear door				
Width	1562	1562	1562	1562
Height	1520	1790	1520	1790
Side door				
Width	1250	1250	1250	1250
Height	1485	1755	1485	1755
Load compartment				
Maximum length	3120	3120	3120	3120
Maximum width	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422
Maximum height	1662	1932	1662	1932
M Load threshold height (unladen)	535	535	535	535

Volume 10 m ³	Van 33 [▲]				Van 35 [▲]				
Model version	290.5V4	290.5V5	290.5V6	290.5V7	290.AV4	290.AV5	290.AV6	290.AV7	290.AVN
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power
Kerb weight (kg)	1935	1935	1950	1950	1935	1935	1950	1950	2310
Payload (kg)	1365	1365	1350	1350	1565	1565	1550	1550	1190
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500	3500
Top speed (km/h)	148	156	163	170	148	156	163	170	159
NEDC fuel cons. (l/100 km)	6.5-6.8	6.6-6.8	6.7-7	6.7-7	6.5-6.8	6.5-6.8	6.7-7	6.7-7	12.4-12.7*
NEDC CO ₂ emissions (g/km)	173-179	173-179	178-185	178-185	173-179	173-179	178-184	178-184	223-228
NEDC fuel cons. (l/100 km) - 9 Speed		7.7-8	7.7-8	7.7-8		7.7-8	7.7-8	7.7-8	
NEDC CO ₂ emissions (g/km) - 9 Speed		205-211	205-211	205-211		205-211	205-211	205-211	

Volume 11.5 m ³	Van 33 High				Van 35 High				
Model version	290.5H4 / 290.5X4	290.5H5 / 290.5X5	290.5H6 / 290.5X6	290.5H7 / 290.5X7	290.AH4 / 290.AX4	290.AH5 / 290.AX5	290.AH6 / 290.AX6	290.AH7 / 290.AX7	290.AHN / 290.AXN
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power
Kerb weight (kg)	1935	1935	1950	1950	1935	1935	1950	1950	2310
Payload (kg)	1365	1365	1350	1350	1565	1565	1550	1550	1190
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500	3500
Top speed (km/h)	143	153	159	165	143	153	159	165	155
NEDC fuel cons. (l/100 km)	6.8-7.3	6.8-7.3	7.0-7.5	7.0-7.5	6.8-7.3	6.8-7.3	7.0-7.5	7.0-7.5	12.7-13.0*
NEDC CO ₂ emissions (g/km)	180-193	180-194	185-198	185-198	180-193	180-194	185-198	185-198	227-232
NEDC fuel cons. (l/100 km) - 9 Speed		8.1-8.2	8.1-8.2	8.1-8.2		8.1-8.2	8.1-8.2	8.1-8.2	
NEDC CO ₂ emissions (g/km) - 9 Speed		214-217	214-217	214-217		213-217	213-217	213-217	

♦ Fuel consumption (m³/100 km)
▲ Glazed version only

MAXI VAN WHEELBASE 3450 MM

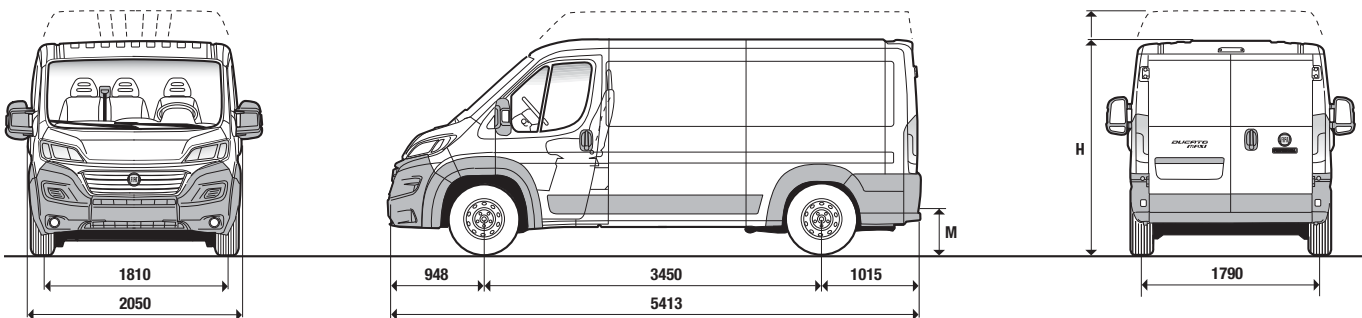


Dimensions mm	Van Maxi 35		Van Maxi 40 High	
	Standard	High		
Wheelbase	3450	3450		3450
Maximum length	5413	5413		5413
Maximum width	2050	2050		2050
Front track	1810	1810		1810
Rear track	1790	1790		1790
H Maximum height (unladen)	2269	2539		2539
Front overhang	948	948		948
Rear overhang	1015	1015		1015
Rear door				
Width	1562	1562		1562
Height	1520	1790		1790
Side door				
Width	1250	1250		1250
Height	1485	1755		1755
Load compartment				
Maximum length	3120	3120		3120
Maximum width	1870	1870		1870
Width between wheel arches	1422	1422		1422
Maximum height	1662	1932		1932
M Load threshold height (unladen)	550	550		550

Volume 10 m ³	Van Maxi 35			
Model version	295.AL5	295.AL6	295.AL7	295.ALN
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power
Kerb weight (kg)	1975	1990	1990	2350
Payload (kg)	1525	1510	1510	1150
GVW (kg)	3500	3500	3500	3500
Top speed (km/h)	156	161	161	159
NEDC fuel cons. (l/100 km)	6.6-6.8	6.8-7.1	6.8-7.1	12.4-12.8*
NEDC CO ₂ emissions (g/km)	174-181	180-186	180-186	223-228
NEDC fuel cons. (l/100 km) - 9 Speed	7.8-8.0	7.8-8.0	7.8-8.1	
NEDC CO ₂ emissions (g/km) - 9 Speed	206-213	206-213	206-213	

Volume 11.5 m ³	Van Maxi 35 High				Van Maxi 40 High			
Model version	295.AG5	295.AG6	295.AG7	295.AGN	295.FG5 ***	295.FG6	295.FG7	295.FGN
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power
Kerb weight (kg)	2000	2015	2015	2375	2060	2060	2060	2420
Payload (kg)	1500	1485	1485	1125	2190	2190	2190	1830
GVW (kg)	3500	3500	3500	3500	4250 *+**	4220 *+**	4220 *+**	4250
Top speed (km/h)	153	158	161	155	90	90	90	90
NEDC fuel cons. (l/100 km)	6.9-7.1	7.2-7.4	7.2-7.4	12.7-13.0*	—	—	—	—
NEDC CO ₂ emissions (g/km)	181-188	189-195	189-195	228-233	—	—	—	—
NEDC fuel cons. (l/100 km) - 9 Speed	8.2-8.4	8.2-8.4	8.2-8.5		—	—	—	
NEDC CO ₂ emissions (g/km) - 9 Speed	216-223	216-223	216-224		—	—	—	

Note: NEDC values for emission and consumption not requested for N2 homologated vehicles
♦ Fuel consumption (m³/100 km)
* with 3 seats configuration (opt. 293): GVW 4200 kg on 140 hp and GVW 4250 kg on 160 hp and 180 hp
** GVW 4250 kg with opt 7MB (Incomplete vehicle homologation, needed second stage homologation)
*** AT9 gearbox standard. Manual gearbox only with opt 7MB (incomplete homologation) and opt 1AX (Automatic Gearbox and Smart Tachograph Exclusion)

MAXI GLAZED/HALF-GLAZED VAN WHEELBASE 3450 MM

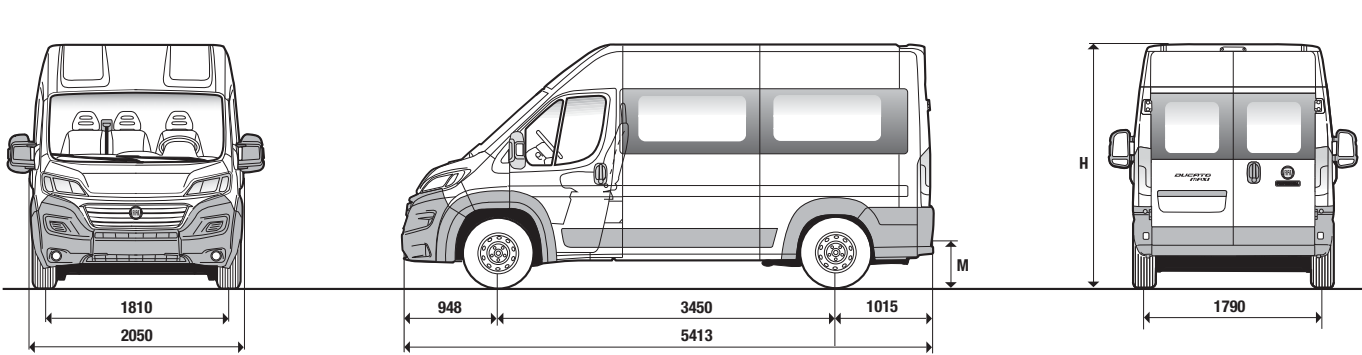

Dimensions mm	Van Maxi 35 High	Van Maxi 40 High
Wheelbase	3450	3450
Maximum length	5413	5413
Maximum width	2050	2050
Front track	1810	1810
Rear track	1790	1790
H Maximum height (unladen)	2539	2539
Front overhang	948	948
Rear overhang	1015	1015
Rear door		
Width	1562	1562
Height	1790	1790
Side door		
Width	1250	1250
Height	1755	1755
Load compartment		
Maximum length	3120	3120
Maximum width	1870	1870
Width between wheel arches	1422	1422
Maximum height	1932	1932
M Load threshold height (unladen)	550	550

Volume 11.5 m ³	Van Maxi 35 High				Van Maxi 40 High			
Model version	295.AH5 / 295.AX5	295.AH6 / 295.AX6	295.AH7 / 295.AX7	295.AHN / 295.AXN	295.FH5 *** / 295.FX5 ***	295.FH6 / 295.FX6	295.FH7 / 295.FX7	295.FHN / 295.FXN
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power
Kerb weight (kg)	2000	2015	2015	2375	2060	2060	2060	2420
Payload (kg)	1500	1485	1485	1125	2160	2160	2160	1830
GVW (kg)	3500	3500	3500	3500	4250 *+**	4220 *+**	4220 *+**	4250
Top speed (km/h)	153	158	161	155	90	90	90	90
NEDC fuel cons. (l/100 km)	6.9-7.4	7.2-7.6	7.2-7.6	12.7-13.0*	–	–	–	–
NEDC CO ₂ emissions (g/km)	181-195	189-200	189-200	228-233	–	–	–	–
NEDC fuel cons. (l/100 km) - 9 Speed	8.2-8.6	8.2-8.7	8.2-8.7		–	–	–	
NEDC CO ₂ emissions (g/km) - 9 Speed	216-228	216-229	216-229		–	–	–	

Note: NEDC values for emission and consumption not requested for N2 homologated vehicles


♦ Fuel consumption (m³/100 km)

* with 3 seats configuration (opt. 293): GVW 4200 kg on 140 hp and GVW 4250 kg on 160 hp and 180 hp

** GVW 4250 kg with opt 7MB (Incomplete vehicle homologation, needed second stage homologation)

*** AT9 gearbox standard. Manual gearbox only with opt 7MB (incomplete homologation) and opt 1AX (Automatic Gearbox and Smart Tachograph Exclusion)

VAN WHEELBASE 4035 MM

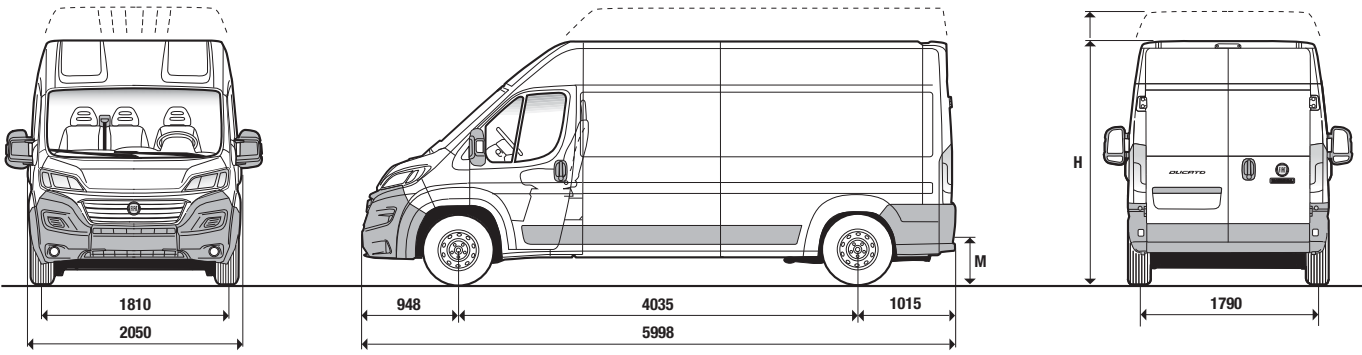


Dimensions mm	Van 33		Van 35	
	High	Super High	High	Super High
Wheelbase	4035	4035	4035	4035
Maximum length	5998	5998	5998	5998
Maximum width	2050	2050	2050	2050
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
H Maximum height (unladen)	2524	2764	2524	2764
Front overhang	948	948	948	948
Rear overhang	1015	1015	1015	1015
Rear door				
Width	1562	1562	1562	1562
Height	1790	2030	1790	2030
Side door				
Width	1250	1250	1250	1250
Height	1755	1755	1755	1755
Load compartment				
Maximum length	3705	3705	3705	3705
Maximum width	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422
Maximum height	1932	2172	1932	2172
M Load threshold height (unladen)	535	535	535	535

Volume 13 m ³	Van 33 High				Van 35 High				
Model version	290.6G4	290.6G5	290.6G6	290.6G7	290.BG4	290.BG5	290.BG6	290.BG7	290.BGN
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power
Kerb weight (kg)	2010	2010	2025	2025	2010	2010	2025	2025	2385
Payload (kg)	1290	1290	1275	1275	1490	1490	1475	1475	1115
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500	3500
Top speed (km/h)	143	153	159	165	143	153	159	165	155
NEDC fuel cons. (l/100 km)	6.9-7.2	6.9-7.2	7.1-7.3	7.1-7.3	6.9-7.2	6.9-7.2	7.1-7.3	7.1-7.3	12.7-13.0*
NEDC CO ₂ emissions (g/km)	183-189	183-190	188-194	188-194	182-189	183-190	188-194	188-194	228-233
NEDC fuel cons. (l/100 km) - 9 Speed		8.1-8.2	8.1-8.2	8.1-8.2		8.1-8.2	8.1-8.2	8.1-8.2	
NEDC CO ₂ emissions (g/km) - 9 Speed		214-217	214-217	214-217		214-217	214-217	214-217	

Volume 15 m ³	Van 33 Super High				Van 35 Super High				
Model version	290.6A4	290.6A5	290.6A6	290.6A7	290.BA4	290.BA5	290.BA6	290.BA7	290.BAN
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power
Kerb weight (kg)	2035	2035	2050	2050	2035	2035	2050	2050	2410
Payload (kg)	1265	1265	1250	1250	1465	1465	1450	1450	1090
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500	3500
Top speed (km/h)	138	149	154	161	138	149	154	161	153
NEDC fuel cons. (l/100 km)	7.1-7.4	7.1-7.4	7.3-7.6	7.3-7.6	7.1-7.4	7.1-7.4	7.3-7.6	7.3-7.6	12.9-13.2*
NEDC CO ₂ emissions (g/km)	189-195	189-196	194-200	194-200	188-195	189-196	194-200	194-200	232-237
NEDC fuel cons. (l/100 km) - 9 Speed		TBC	TBC	7.6-8.7		TBC	TBC	7.6-8.7	
NEDC CO ₂ emissions (g/km) - 9 Speed		TBC	TBC	200-230		TBC	TBC	200-230	

♦ Fuel consumption (m³/100 km)

GLAZED/HALF-GLAZED VAN WHEELBASE 4035 MM

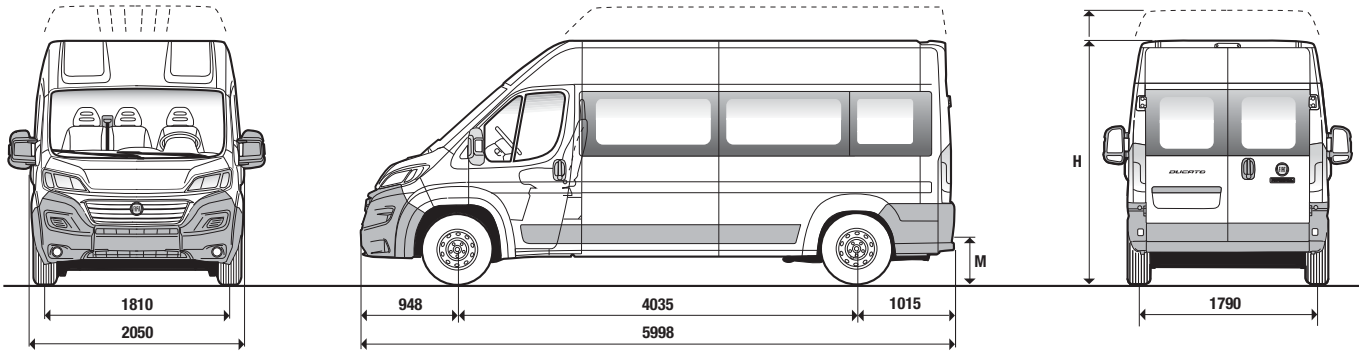


Dimensions mm	Van 33		Van 35	
	High	Super High	High	Super High
Wheelbase	4035	4035	4035	4035
Maximum length	5998	5998	5998	5998
Maximum width	2050	2050	2050	2050
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
H Maximum height (unladen)	2524	2764	2524	2764
Front overhang	948	948	948	948
Rear overhang	1015	1015	1015	1015
Rear door				
Width	1562	1562	1562	1562
Height	1790	2030	1790	2030
Side door				
Width	1250	1250	1250	1250
Height	1755	1755	1755	1755
Load compartment				
Maximum length	3705	3705	3705	3705
Maximum width	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422
Maximum height	1932	2172	1932	2172
M Load threshold height (unladen)	535	535	535	535

Volume 13 m ³	Van 33 High				Van 35 High				
	290.6H4 / 290.6X4	290.6H5 / 290.6X5	290.6H6 / 290.6X6	290.6H7 / 290.6X7	290.BH4 / 290.BX4	290.BH5 / 290.BX5	290.BH6 / 290.BX6	290.BH7 / 290.BX7	290.BHN / 290.BXN
Model version	290.6H4 / 290.6X4	290.6H5 / 290.6X5	290.6H6 / 290.6X6	290.6H7 / 290.6X7	290.BH4 / 290.BX4	290.BH5 / 290.BX5	290.BH6 / 290.BX6	290.BH7 / 290.BX7	290.BHN / 290.BXN
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power
Kerb weight (kg)	2010	2010	2025	2025	2010	2010	2025	2025	2385
Payload (kg)	1290	1290	1275	1275	1490	1490	1475	1475	1115
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500	3500
Top speed (km/h)	143	153	159	165	143	153	159	165	155
NEDC fuel cons. (l/100 km)	6.9-7.2	6.9-7.2	7.1-7.4	7.1-7.4	6.9-7.2	6.9-7.2	7.1-7.3	7.1-7.3	12.7-13.0*
NEDC CO ₂ emissions (g/km)	183-189	183-190	188-195	188-195	182-189	182-190	188-194	188-194	228-233
NEDC fuel cons. (l/100 km) - 9 Speed		8.1-8.2	8.1-8.2	8.1-8.2		8.1-8.2	8.1-8.2	8.1-8.2	
NEDC CO ₂ emissions (g/km) - 9 Speed		214-217	214-217	214-217		214-217	214-217	214-217	

Volume 15 m ³	Van 33 Super High^				Van 35 Super High^				
	290.6B4	290.6B5	290.6B6	290.6B7	290.BB4	290.BB5	290.BB6	290.BB7	290.BBN
Model version	290.6B4	290.6B5	290.6B6	290.6B7	290.BB4	290.BB5	290.BB6	290.BB7	290.BBN
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power
Kerb weight (kg)	2035	2035	2050	2050	2035	2035	2050	2050	2410
Payload (kg)	1265	1265	1250	1250	1465	1465	1450	1450	1090
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500	3500
Top speed (km/h)	138	149	154	161	138	149	154	161	153
NEDC fuel cons. (l/100 km)	7.1-7.4	7.1-7.4	7.3-7.6	7.3-7.6	7.1-7.4	7.1-7.4	7.3-7.6	7.3-7.6	12.9-13.2*
NEDC CO ₂ emissions (g/km)	189-195	189-196	194-201	194-201	188-195	189-196	194-200	194-200	232-237
NEDC fuel cons. (l/100 km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC	
NEDC CO ₂ emissions (g/km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC	

♦ Fuel consumption (m³/100 km)
▲ Glazed version only

MAXI VAN WHEELBASE 4035 MM

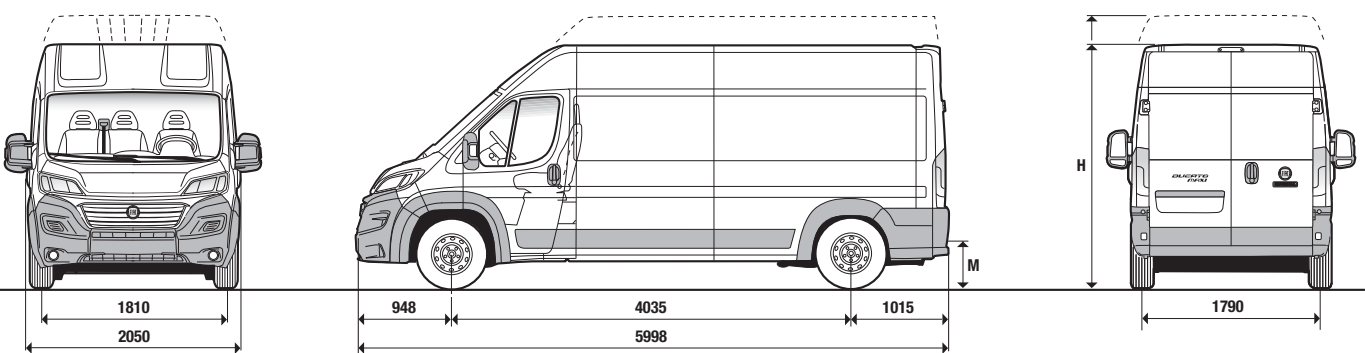


Dimensions mm	Van Maxi 35		Van Maxi 40	
	High	Super High	High	Super High
Wheelbase	4035	4035	4035	4035
Maximum length	5998	5998	5998	5998
Maximum width	2050	2050	2050	2050
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
H Maximum height (unladen)	2534	2774	2534	2774
Front overhang	948	948	948	948
Rear overhang	1015	1015	1015	1015
Rear door				
Width	1562	1562	1562	1562
Height	1790	2030	1790	2030
Side door				
Width	1250	1250	1250	1250
Height	1755	1755	1755	1755
Load compartment				
Maximum length	3705	3705	3705	3705
Maximum width	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422
Maximum height	1932	2172	1932	2172
M Load threshold height (unladen)	550	550	550	550

Volume 13 m ³	Van Maxi 35 High				Van Maxi 40 High			
	295.BG5	295.BG6	295.BG7	295.BGN	295.GG5 ***	295.GG6	295.GG7	295.GGN
Model version	295.BG5	295.BG6	295.BG7	295.BGN	295.GG5 ***	295.GG6	295.GG7	295.GGN
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power
Kerb weight (kg)	2050	2065	2065	2425	2110	2110	2110	2470
Payload (kg)	1450	1435	1435	1075	2140	2140	2140	1780
GVW (kg)	3500	3500	3500	3500	4250	4250	4250	4250
Top speed (km/h)	153	158	161	155	90	90	90	90
NEDC fuel cons. (l/100 km)	7.0-7.2	7.2-7.4	7.2-7.4	12.7-13.1*	-	-	-	-
NEDC CO ₂ emissions (g/km)	184-191	189-196	189-196	228-234	-	-	-	-
NEDC fuel cons. (l/100 km) - 9 Speed	8.2-8.5	8.2-8.5	8.2-8.5		-	-	-	
NEDC CO ₂ emissions (g/km) - 9 Speed	216-224	217-224	217-224		-	-	-	

Volume 15 m ³	Van 35 Maxi Super High				Van 40 Maxi Super High			
	295.BA5	295.BA6	295.BA7	295.BAN	295.GA5 ***	295.GA6	295.GA7	295.GAN
Model version	295.BA5	295.BA6	295.BA7	295.BAN	295.GA5 ***	295.GA6	295.GA7	295.GAN
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power
Kerb weight (kg)	2075	2090	2090	2450	2135	2135	2135	2495
Payload (kg)	1425	1410	1410	1050	2115	2115	2115	1755
GVW (kg)	3500	3500	3500	3500	4250	4250	4250	4250
Top speed (km/h)	149	153	156	153	90	90	90	90
NEDC fuel cons. (l/100 km)	7.2-7.5	7.4-7.7	7.4-7.7	13.0-13.3*	-	-	-	-
NEDC CO ₂ emissions (g/km)	190-197	195-202	195-202	232-238	-	-	-	-
NEDC fuel cons. (l/100 km) - 9 Speed	8.4-8.7	8.5-8.8	8.5-8.8		-	-	-	
NEDC CO ₂ emissions (g/km) - 9 Speed	223-231	223-231	224-232		-	-	-	

Note: NEDC values for emission and consumption not requested for N2 homologated vehicles
♦ Fuel consumption (m³/100 km)
*** AT9 gearbox standard. Manual gearbox only with opt 7MB (incomplete homologation) and opt 1AX (Automatic Gearbox and Smart Tachograph Exclusion)

MAXI GLAZED/HALF-GLAZED VAN WHEELBASE 4035 MM

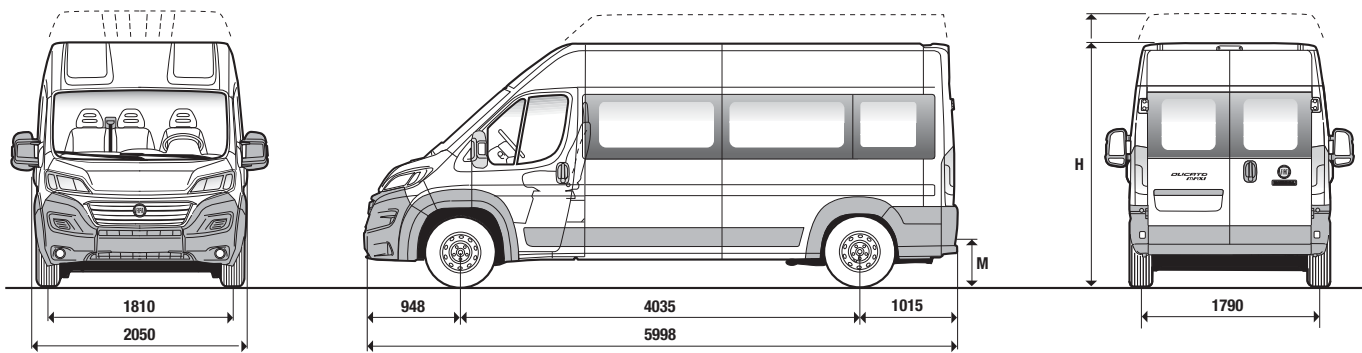

Dimensions mm	Van Maxi 35		Van Maxi 40	
	High	Super High	High	Super High
Wheelbase	4035	4035	4035	4035
Maximum length	5998	5998	5998	5998
Maximum width	2050	2050	2050	2050
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
H Maximum height (unladen)	2534	2774	2534	2774
Front overhang	948	948	948	948
Rear overhang	1015	1015	1015	1015
Rear door				
Width	1562	1562	1562	1562
Height	1790	2030	1790	2030
Side door				
Width	1250	1250	1250	1250
Height	1755	1755	1755	1755
Load compartment				
Maximum length	3705	3705	3705	3705
Maximum width	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422
Maximum height	1932	2172	1932	2172
M Load threshold height (unladen)	550	550	550	550

Volume 13 m ³	Van Maxi 35 High				Van Maxi 40 High			
	295.BH5 / 295.BX5	295.BH6 / 295.BX6	295.BH7 / 295.BX7	295.BHN / 295.BXN	295.GH5 *** / 295.GX5 ***	295.GH6 / 295.GX6	295.GH7 / 295.GX7	295.GHN / 295.GXN
Model version	295.BH5 / 295.BX5	295.BH6 / 295.BX6	295.BH7 / 295.BX7	295.BHN / 295.BXN	295.GH5 *** / 295.GX5 ***	295.GH6 / 295.GX6	295.GH7 / 295.GX7	295.GHN / 295.GXN
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power
Kerb weight (kg)	2050	2065	2065	2425	2110	2110	2110	2470
Payload (kg)	1450	1435	1435	1075	2140	2140	2140	1780
GVW (kg)	3500	3500	3500	3500	4250	4250	4250	4250
Top speed (km/h)	153	158	161	155	90	90	90	90
NEDC fuel cons. (l/100 km)	7-7.4	7.2-7.6	7.2-7.6	12.7-13.1*	-	-	-	-
NEDC CO ₂ emissions (g/km)	184-196	189-201	189-201	228-234	-	-	-	-
NEDC fuel cons. (l/100 km) - 9 Speed	8.2-8.7	8.2-8.7	8.2-8.7	-	-	-	-	-
NEDC CO ₂ emissions (g/km) - 9 Speed	216-229	217-230	217-230	-	-	-	-	-

Volume 15 m ³	Van 35 Maxi Super High^				Van 40 Maxi Super High^			
	295.BB5	295.BB6	295.BB7	295.BBN	295.GB5 ***	295.GB6	295.GB7	295.GBN
Model version	295.BB5	295.BB6	295.BB7	295.BBN	295.GB5 ***	295.GB6	295.GB7	295.GBN
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power
Kerb weight (kg)	2075	2090	2090	2450	2135	2135	2135	2495
Payload (kg)	1425	1410	1410	1050	2115	2115	2115	1755
GVW (kg)	3500	3500	3500	3500	4250	4250	4250	4250
Top speed (km/h)	149	153	156	153	90	90	90	90
NEDC fuel cons. (l/100 km)	7.2-7.5	7.4-7.7	7.4-7.7	13.0-13.3*	-	-	-	-
NEDC CO ₂ emissions (g/km)	190-197	195-202	195-202	232-238	-	-	-	-
NEDC fuel cons. (l/100 km) - 9 Speed	8.4-8.7	8.5-8.8	8.5-8.8	-	-	-	-	-
NEDC CO ₂ emissions (g/km) - 9 Speed	223-231	223-231	224-232	-	-	-	-	-


Note: NEDC values for emission and consumption not requested for N2 homologated vehicles

* Fuel consumption (m³/100 km)

^ Glazed version only

*** AT9 gearbox standard. Manual gearbox only with opt 7MB (incomplete homologation) and opt 1AX (Automatic Gearbox and Smart Tachograph Exclusion)

VAN XL WHEELBASE 4035 MM

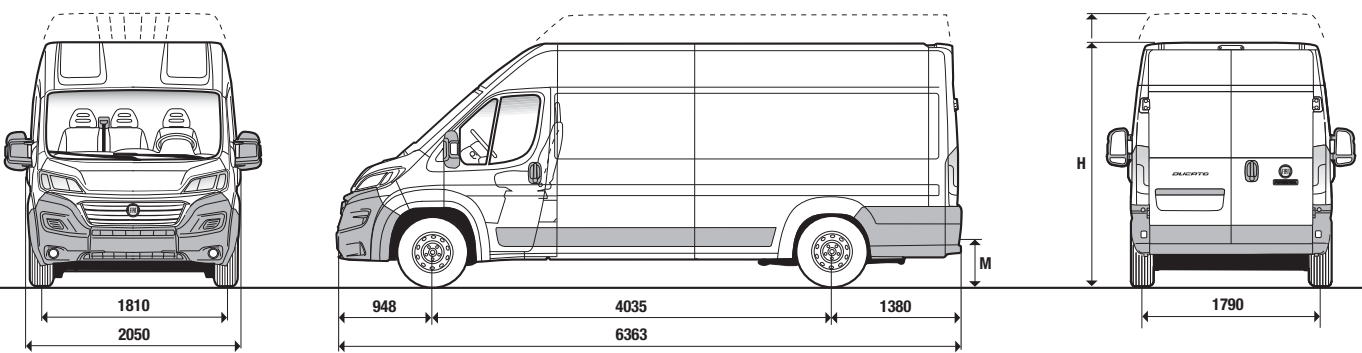


Dimensions mm	Van 35 XL	
	High	Super High
Wheelbase	4035	4035
Maximum length	6363	6363
Maximum width	2050	2050
Front track	1810	1810
Rear track	1790	1790
H Maximum height (unladen)	2539	2779
Front overhang	948	948
Rear overhang	1380	1380
Rear door		
Width	1562	1562
Height	1790	2030
Side door		
Width	1250	1250
Height	1755	1755
Load compartment		
Maximum length	535	4070
Maximum width	1870	1870
Width between wheel arches	1422	1422
Maximum height	1932	2172
M Load threshold height (unladen)	535	535

Volume 15 m ³	Van 35 XL High				
	290.CG4	290.CG5	290.CG6	290.CG7	290.CGN
Model version	290.CG4	290.CG5	290.CG6	290.CG7	290.CGN
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power
Kerb weight (kg)	2055	2055	2070	2070	2430
Payload (kg)	1445	1445	1430	1430	1070
GVW (kg)	3500	3500	3500	3500	3500
Top speed (km/h)	143	153	159	165	155
NEDC fuel cons. (l/100 km)	6.9-7.2	6.9-7.2	7.1-7.4	7.1-7.4	12.7-13.0*
NEDC CO ₂ emissions (g/km)	183-190	183-190	188-195	188-195	228-233
NEDC fuel cons. (l/100 km) - 9 Speed	-	8.1-8.1	8.1-8.1	8.1-8.1	-
NEDC CO ₂ emissions (g/km) - 9 Speed	-	214-214	214-214	214-214	-

Volume 17 m ³	Van 35 XL Super High				
	290.CA4	290.CA5	290.CA6	290.CA7	290.CAN
Model version	290.CA4	290.CA5	290.CA6	290.CA7	290.CAN
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power
Kerb weight (kg)	2085	2085	2100	2100	2460
Payload (kg)	1415	1415	1400	1400	1040
GVW (kg)	3500	3500	3500	3500	3500
Top speed (km/h)	138	149	154	161	153
NEDC fuel cons. (l/100 km)	7.1-7.4	7.2-7.4	7.3-7.6	7.3-7.6	12.9-13.2*
NEDC CO ₂ emissions (g/km)	189-196	189-196	194-201	194-201	232-237
NEDC fuel cons. (l/100 km) - 9 Speed	-	TBC	TBC	TBC	-
NEDC CO ₂ emissions (g/km) - 9 Speed	-	TBC	TBC	TBC	-

* Fuel consumption (m³/100 km)

MAXI VAN XL WHEELBASE 4035 MM

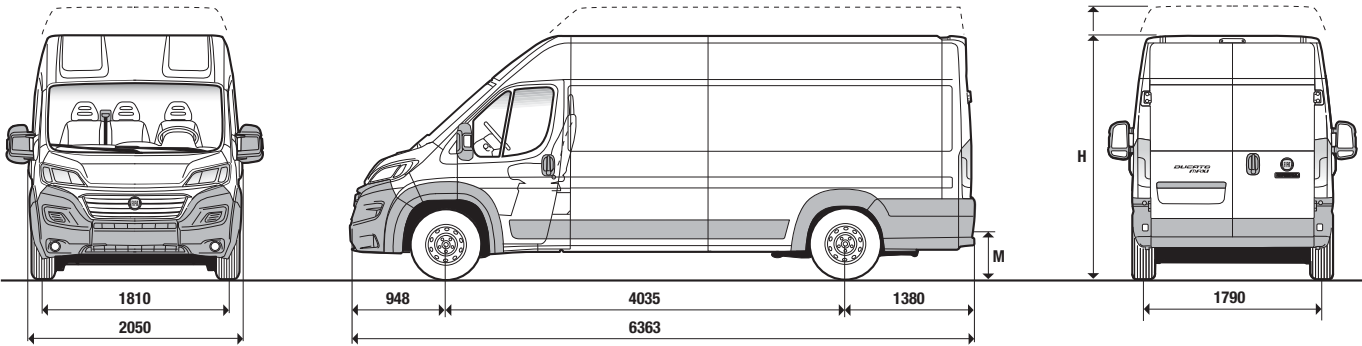

Dimensions mm	Van Maxi 35 XL		Van Maxi 40 XL	
	High	Super High	High	Super High
Wheelbase	4035	4035	4035	4035
Maximum length	6363	6363	6363	6363
Maximum width	2050	2050	2050	2050
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
H Maximum height (unladen)	2534	2774	2534	2779
Front overhang	948	948	948	948
Rear overhang	1380	1380	1380	1380
Rear door				
Width	1562	1562	1562	1562
Height	1790	2030	1790	2030
Side door				
Width	1250	1250	1250	1250
Height	1755	1755	1755	1755
Load compartment				
Maximum length	4070	4070	4070	4070
Maximum width	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422
Maximum height	1932	2172	1932	2172
M Load threshold height (unladen)	550	550	550	550

Volume 15 m ³	Van Maxi 35 XL High				Van Maxi 40 XL High			
Model version	295.CG5	295.CG6	295.CG7	295.CGN	295.HG5 ***	295.HG6	295.HG7	295.HGN
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power
Kerb weight (kg)	2095	2110	2110	2470	2155	2155	2155	2515
Payload (kg)	1405	1390	1390	1030	2015	2015	2015	1735
GVW (kg)	3500	3500	3500	3500	4170 **	4170 **	4170 **	4250
Top speed (km/h)	153	158	161	155	90	90	90	90
NEDC fuel cons. (l/100 km)	7.0-7.2	7.2-7.5	7.2-7.5	12.8-13.1*	—	—	—	—
NEDC CO ₂ emissions (g/km)	184-192	190-197	190-197	228-234	—	—	—	—
NEDC fuel cons. (l/100 km) - 9 Speed	8.2-8.5	8.2-8.5	8.2-8.5		—	—	—	
NEDC CO ₂ emissions (g/km) - 9 Speed	217-225	217-225	217-225		—	—	—	

Volume 17 m ³	Van Maxi 35 XL Super High				Van Maxi 40 XL Super High			
Model version	295.CA5	295.CA6	295.CA7	295.CAN	295.HA5 ***	295.HA6	295.HA7	295.HAN
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power
Kerb weight (kg)	2125	2140	2140	2500	2185	2185	2185	2545
Payload (kg)	1375	1360	1360	1000	1985	1985	1985	1705
GVW (kg)	3500	3500	3500	3500	4170 **	4170 **	4170 **	4250
Top speed (km/h)	149	153	156	153	90	90	90	90
NEDC fuel cons. (l/100 km)	7.3-7.6	7.5-7.8	7.5-7.8	13.0-13.3*	—	—	—	—
NEDC CO ₂ emissions (g/km)	193-201	198-206	198-206	233-238	—	—	—	—
NEDC fuel cons. (l/100 km) - 9 Speed	8.6-8.9	8.6-8.9	8.6-8.9		—	—	—	
NEDC CO ₂ emissions (g/km) - 9 Speed	226-234	227-235	227-235		—	—	—	


Note: NEDC values for emission and consumption not requested for N2 homologated vehicles

♦ Fuel consumption (m³/100 km)

** GVW 4250 kg with opt 7MB (Incomplete vehicle homologation, needed second stage homologation)

*** AT9 gearbox standard. Manual gearbox only with opt 7MB (incomplete homologation) and opt 1AX (Automatic Gearbox and Smart Tachograph Exclusion)

MAXI VAN GLAZED XL WHEELBASE 4035 MM

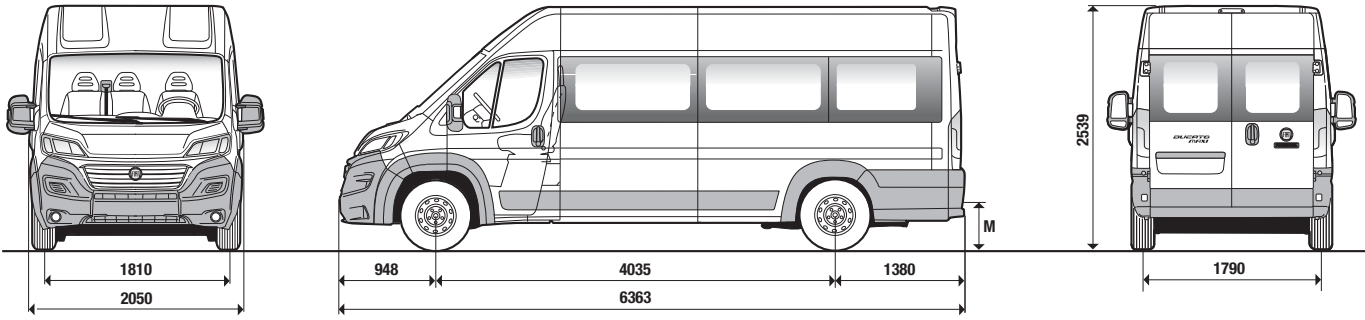

Dimensions mm	Van Maxi 35 XL High	Van Maxi 40 XL High
Wheelbase	4035	4035
Maximum length	6363	6363
Maximum width	2050	2050
Front track	1810	1810
Rear track	1790	1790
Maximum height (unladen)	2539	2539
Front overhang	948	948
Rear overhang	1380	1380
Rear door		
Width	1562	1562
Height	1790	1790
Side door		
Width	1250	1250
Height	1755	1755
Load compartment		
Maximum length	4070	4070
Maximum width	1870	1870
Width between wheel arches	1422	1422
Maximum height	1932	1932
M Load threshold height (unladen)	550	550

Volume 15 m ³	Van Maxi 35 XL High				Van Maxi 40 XL High			
Model version	295.CH5	295.CH6	295.CH7	295.CHN	295.HH5 ***	295.HH6	295.HH7	295.HHN
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 Natural Power
Kerb weight (kg)	2095	2110	2110	2470	2155	2155	2155	2515
Payload (kg)	1405	1390	1390	1030	2015	2015	2015	1735
GVW (kg)	3500	3500	3500	3500	4170 **	4170 **	4170 **	4250
Top speed (km/h)	153	158	161	155	90	90	90	90
NEDC fuel cons. (l/100 km)	7-7.2	7.2-7.5	7.2-7.5	12.8-13.1*	—	—	—	—
NEDC CO ₂ emissions (g/km)	184-192	190-197	190-197	228-234	—	—	—	—
NEDC fuel cons. (l/100 km) - 9 Speed	8.2-8.5	8.2-8.5	8.2-8.5		—	—	—	
NEDC CO ₂ emissions (g/km) - 9 Speed	217-225	217-225	217-225		—	—	—	


Note: NEDC values for emission and consumption not requested for N2 homologated vehicles

♦ Fuel consumption (m³/100 km)

** GVW 4250 kg with opt 7MB (Incomplete vehicle homologation, needed second stage homologation)

*** AT9 gearbox standard. Manual gearbox only with opt 7MB (incomplete homologation) and opt 1AX (Automatic Gearbox and Smart Tachograph Exclusion)


VAN CREW CAB (OPT. 7EB)

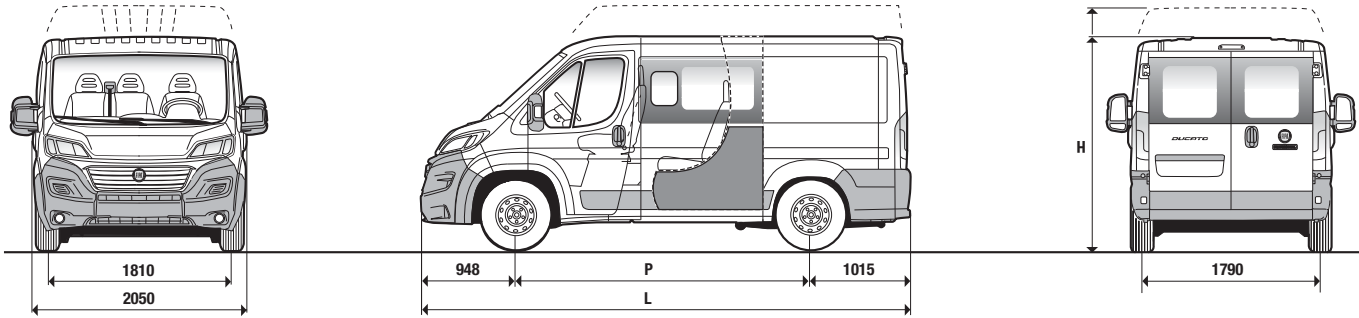

Dimensions mm	Crew Cab 33		Crew Cab 35		Crew Cab Maxi 35	
	Standard	High	Standard	High	High	
P Wheelbase	3000	3450	3000	3450	3450	4035
L Maximum length	4963	5413	4963	5413	5413	5998
Maximum width	2050	2050	2050	2050	2050	2050
Front track	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790
H Maximum height (unladen)	2254	2524	2254	2524	2539	2534
Front overhang	948	948	948	948	948	948
Rear overhang	1015	1015	1015	1015	1015	1015
Rear door						
Width	1562	1562	1562	1562	1562	1562
Height	1520	1790	1520	1790	1790	1790
Side door						
Width	1075	1250	1075	1250	1250	1250
Height	1485	1755	1485	1755	1755	1755
Load compartment						
Maximum length	1480	1930	1480	1930	1930	2515
Maximum width	1870	1870	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422	1422	1422
Maximum height	1662	1932	1662	1932	1932	1932
M Load threshold height (unladen)	535	535	535	535	550	550

Volume 5.5 m ³ Wheelbase 3000 standard roof	Crew Cab 33				Crew Cab 35			
	290.4V4 / 290.4W4	290.4V5 / 290.4W5	290.4V6 / 290.4W6	290.4V7 / 290.4W7	290.9V4 / 290.9W4	290.9V5 / 290.9W5	290.9V6 / 290.9W6	290.9V7 / 290.9W7
Model version	290.4V4 / 290.4W4	290.4V5 / 290.4W5	290.4V6 / 290.4W6	290.4V7 / 290.4W7	290.9V4 / 290.9W4	290.9V5 / 290.9W5	290.9V6 / 290.9W6	290.9V7 / 290.9W7
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2055	2055	2070	2070	2055	2055	2070	2070
Payload (kg)	1245	1245	1230	1230	1445	1445	1430	1430
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (km/h)	148	156	163	170	148	156	163	170
NEDC fuel cons. (l/100 km)	6.5-6.9	6.5-6.9	6.7-7.1	6.7-7.1	6.5-6.9	6.5-6.9	6.7-7.1	6.7-7.1
NEDC CO ₂ emissions (g/km)	172-183	173-183	178-188	178-188	172-183	172-183	178-188	178-188
NEDC fuel cons. (l/100 km) - 9 Speed		7.7-8.1	7.7-8.1	7.7-8.1		7.7-8.1	7.7-8.1	7.7-8.1
NEDC CO ₂ emissions (g/km) - 9 Speed		204-215	204-215	204-215		204-215	204-215	204-215


VAN CREW CAB (OPT. 7EB)

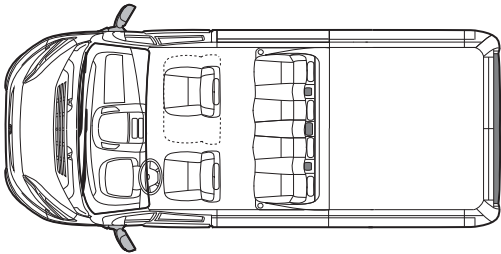

Volume 8 m ³ Wheelbase 3450 high roof	Crew Cab 33 High				Crew Cab 35 High				Crew Cab Maxi 35 High		
	290.5H4 / 290.5X4 + OPT 7EB	290.5H5 / 290.5X5 + OPT 7EB	290.5H6 / 290.5X6 + OPT 7EB	290.5H7 / 290.5X7 + OPT 7EB	290.AH4 / 290.AX4 + OPT 7EB	290.AH5 / 290.AX5 + OPT 7EB	290.AH6 / 290.AX6 + OPT 7EB	290.AH7 / 290.AX7 + OPT 7EB	295.AH5 / 295.AX5 + OPT 7EB	295.AH6 / 295.AX6 + OPT 7EB	295.AH7 / 295.AX7 + OPT 7EB
Model version	290.5H4 / 290.5X4 + OPT 7EB	290.5H5 / 290.5X5 + OPT 7EB	290.5H6 / 290.5X6 + OPT 7EB	290.5H7 / 290.5X7 + OPT 7EB	290.AH4 / 290.AX4 + OPT 7EB	290.AH5 / 290.AX5 + OPT 7EB	290.AH6 / 290.AX6 + OPT 7EB	290.AH7 / 290.AX7 + OPT 7EB	295.AH5 / 295.AX5 + OPT 7EB	295.AH6 / 295.AX6 + OPT 7EB	295.AH7 / 295.AX7 + OPT 7EB
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2120	2120	2135	2135	2120	2120	2135	2135	2160	2175	2175
Payload (kg)	1180	1180	1165	1165	1380	1380	1365	1365	1340	1325	1325
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500	3500	3500	3500
Top speed (km/h)	143	153	159	165	143	153	159	165	153	158	161
NEDC fuel cons. (l/100 km)	7.0-7.3	7.1-7.3	7.2-7.5	7.2-7.5	7.0-7.3	7-7.3	7.2-7.5	7.2-7.5	7.1-7.4	7.3-7.6	7.3-7.6
NEDC CO ₂ emissions (g/km)	186-193	186-194	191-198	191-198	186-193	186-194	191-198	191-198	188-195	193-200	193-200
NEDC fuel cons. (l/100 km) - 9 Speed		8.2-8.2	8.2-8.2	8.2-8.2		8.2-8.2	8.2-8.2	8.2-8.2	8.3-8.6	8.3-8.7	8.3-8.7
NEDC CO ₂ emissions (g/km) - 9 Speed		217-217	217-217	217-217		217-217	217-217	217-217	220-228	221-229	221-229

Volume 10.5 m ³ Wheelbase 4035 high roof	Crew Cab Maxi 35 High		
	295.BH5 / 295.BX5 + OPT 7EB	295.BH6 / 295.BX6 + OPT 7EB	295.BH7 / 295.BX7 + OPT 7EB
Model version	295.BH5 / 295.BX5 + OPT 7EB	295.BH6 / 295.BX6 + OPT 7EB	295.BH7 / 295.BX7 + OPT 7EB
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2210	2225	2225
Payload (kg)	1290	1275	1275
GVW (kg)	3500	3500	3500
Top speed (km/h)	153	158	161
NEDC fuel cons. (l/100 km)	7.1-7.4	7.3-7.6	7.3-7.6
NEDC CO ₂ emissions (g/km)	188-196	193-201	193-201
NEDC fuel cons. (l/100 km) - 9 Speed	8.4-8.7	8.4-8.7	8.4-8.7
NEDC CO ₂ emissions (g/km) - 9 Speed	221-229	221-230	221-230

TRUCK WITH ALUMINIUM SIDE PANELS (OPT. 288)

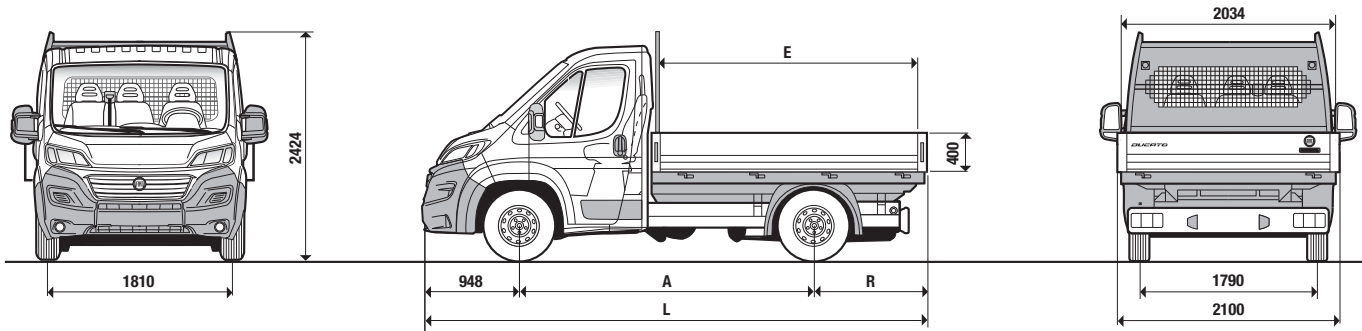


Dimensions mm	Truck 33			Truck 35		
A Wheelbase	3000	3450	3800	3000	3450	3800
L Maximum length	5293	5743	6093	5293	5743	6093
Maximum width	2100	2100	2100	2100	2100	2100
Front track	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790
Maximum height (unladen)	2424	2424	2424	2424	2424	2424
Front overhang	948	948	948	948	948	948
R Rear overhang	1345	1345	1345	1345	1345	1345
E Flatbed interior length	2798	3248	3598	2798	3248	3598
Flatbed interior width	2034	2034	2034	2034	2034	2034
Side panel height	400	400	400	400	400	400

Wheelbase 3000 mm Load surface 5.7 m²	Truck 33				Truck 35			
Model version	290.4C4 + OPT 288	290.4C5 + OPT 288	290.4C6 + OPT 288	290.4C7 + OPT 288	290.9C4 + OPT 288	290.9C5 + OPT 288	290.9C6 + OPT 288	290.9C7 + OPT 288
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	1890	1890	1905	1905	1890	1890	1905	1905
Payload (kg)	1310	1310	1295	1295	1430	1430	1415	1415
GVW (kg)	3200	3200	3200	3200	3320	3320	3320	3320
Top speed (km/h)	148	156	163	170	148	156	163	170
NEDC fuel cons. (l/100 km)	7.7-8.0	7.7-8.0	7.8-8.0	7.8-8.0	7.7-8.0	7.7-8.0	7.8-8.0	7.8-8.0
NEDC CO ₂ emissions (g/km)	204-210	204-210	207-213	207-213	204-210	204-210	207-213	207-213
NEDC fuel cons. (l/100 km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC
NEDC CO ₂ emissions (g/km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC

Wheelbase 3450 mm Load surface 6.6 m²	Truck 33				Truck 35			
Model version	290.5C4 + OPT 288	290.5C5 + OPT 288	290.5C6 + OPT 288	290.5C7 + OPT 288	290.AC4 + OPT 288	290.AC5 + OPT 288	290.AC6 + OPT 288	290.AC7 + OPT 288
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	1935	1935	1950	1950	1935	1935	1950	1950
Payload (kg)	1365	1365	1350	1350	1495	1495	1480	1480
GVW (kg)	3300	3300	3300	3300	3430	3430	3430	3430
Top speed (km/h)	148	156	163	170	148	156	163	170
NEDC fuel cons. (l/100 km)	7.7-8.0	7.8-8.0	7.8-8.1	7.8-8.1	7.7-8.0	7.7-8.0	7.8-8.1	7.8-8.1
NEDC CO ₂ emissions (g/km)	205-210	205-211	207-213	207-213	205-210	205-211	207-213	207-213
NEDC fuel cons. (l/100 km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC
NEDC CO ₂ emissions (g/km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC

Wheelbase 3800 mm Load surface 7.3 m²	Truck 33				Truck 35			
Model version	290.KC4 + OPT 288	290.KC5 + OPT 288	290.KC6 + OPT 288	290.KC7 + OPT 288	290.LC4 + OPT 288	290.LC5 + OPT 288	290.LC6 + OPT 288	290.LC7 + OPT 288
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	1970	1970	1985	1985	1970	1970	1985	1985
Payload (kg)	1330	1330	1315	1315	1530	1530	1515	1515
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (km/h)	148	156	163	170	148	156	163	170
NEDC fuel cons. (l/100 km)	7.8-8.0	7.8-8.0	7.9-8.1	7.9-8.1	7.8-8.0	7.8-8.0	7.9-8.1	7.9-8.1
NEDC CO ₂ emissions (g/km)	205-211	205-211	207-214	208-214	205-211	205-211	207-214	207-214
NEDC fuel cons. (l/100 km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC
NEDC CO ₂ emissions (g/km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC

TRUCK WITH ALUMINIUM SIDE PANELS (OPT. 288)

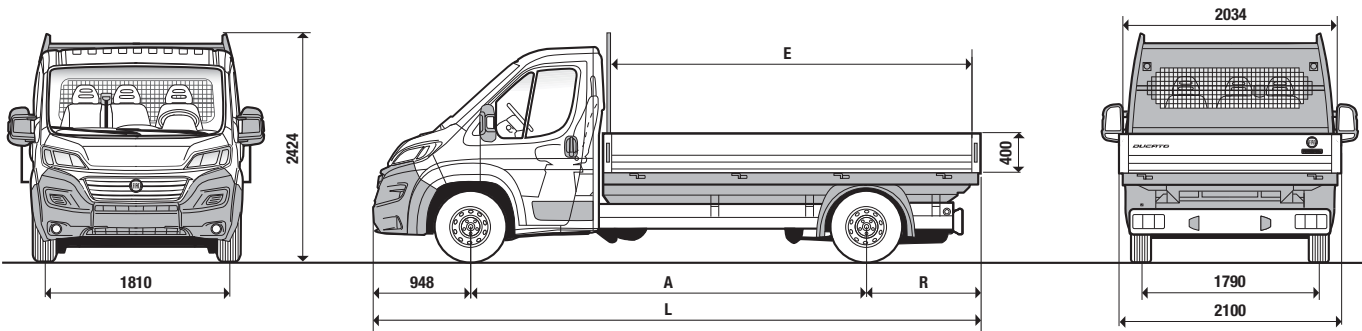


Dimensions mm	Truck 33			Truck 35		
A Wheelbase	4035	4035	4035	4035	4035	4035
L Maximum length	6328	6328	6328	6328	6328	6328
Maximum width	2100	2100	2100	2100	2100	2100
Front track	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790
Maximum height (unladen)	2424	2424	2424	2424	2424	2424
Front overhang	948	948	948	948	948	948
R Rear overhang	1345	1345	1345	1345	1345	1345
E Flatbed interior length	3833	3833	3833	3833	3833	3833
Flatbed interior width	2034	2034	2034	2034	2034	2034
Side panel height	400	400	400	400	400	400

Wheelbase 4035 mm Load surface 7.8 m²	Truck 33				Truck 35			
Model version	290.6C4 + OPT 288	290.6C5 + OPT 288	290.6C6 + OPT 288	290.6C7 + OPT 288	290.BC4 + OPT 288	290.BC5 + OPT 288	290.BC6 + OPT 288	290.BC7 + OPT 288
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	1990	1990	2005	2005	1990	1990	2005	2005
Payload (kg)	1310	1310	1295	1295	1510	1510	1495	1495
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (km/h)	148	156	163	170	148	156	163	170
NEDC fuel cons. (l/100 km)	7.8-8.0	7.8-8.0	7.9-8.2	7.9-8.2	7.8-8.0	7.8-8.0	7.9-8.2	7.9-8.2
NEDC CO ₂ emissions (g/km)	205-211	205-211	210-216	210-216	205-211	205-211	210-216	210-216
NEDC fuel cons. (l/100 km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC
NEDC CO ₂ emissions (g/km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC

Wheelbase 4035 mm XL Load surface 8.5 m²	Truck 35			
Model version	290.CC4 + OPT 288	290.CC5 + OPT 288	290.CC6 + OPT 288	290.CC7 + OPT 288
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2025	2025	2040	2040
Payload (kg)	1465	1465	1450	1450
GVW (kg)	3500	3500	3500	3500
Top speed (km/h)	148	156	163	170
NEDC fuel cons. (l/100 km)	7.9-8.1	7.9-8.1	7.9-8.2	7.9-8.2
NEDC CO ₂ emissions (g/km)	207-213	208-214	210-217	210-217
NEDC fuel cons. (l/100 km) - 9 Speed		TBC	TBC	TBC
NEDC CO ₂ emissions (g/km) - 9 Speed		TBC	TBC	TBC

MAXI TRUCK WITH ALUMINIUM SIDE PANELS (OPT. 288)

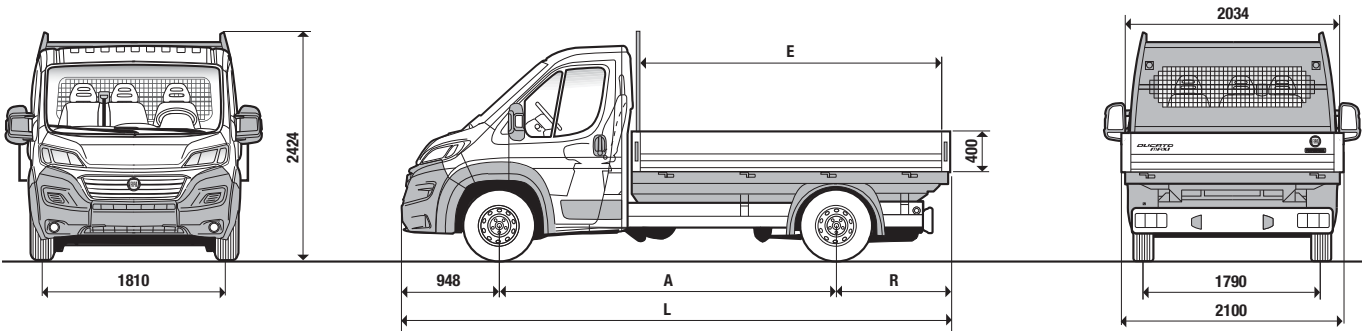

Dimensions mm	Truck Maxi 35		Truck Maxi 40	
A Wheelbase	3450	3800	3450	3800
L Maximum length	5743	6093	5743	6093
Maximum width	2100	2100	2100	2100
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
Maximum height (unladen)	2424	2424	2424	2424
Front overhang	948	948	948	948
R Rear overhang	1345	1345	1345	1345
E Flatbed interior length	3248	3660	3248	3598
Flatbed interior width	2034	2034	2034	2034
Side panel height	400	400	400	400


Wheelbase 3000 mm Load surface 5.7 m²	Truck Maxi 35		
Model version	295.9C5 + OPT 288	295.9C6 + OPT 288	295.9C7 + OPT 288
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	1930	1945	1945
Payload (kg)	1605	1605	1605
GVW (kg)	3500	3500	3500
Top speed (km/h)	156	161	161
NEDC fuel cons. (l/100 km)	7.7-8.0	7.7-8.0	7.7-8.0
NEDC CO ₂ emissions (g/km)	205-211	204-212	204-212
NEDC fuel cons. (l/100 km) - 9 Speed	8.6-8.9	8.6-8.9	8.6-8.9
NEDC CO ₂ emissions (g/km) - 9 Speed	228-234	228-234	227-234

Wheelbase 3450 mm Load surface 6.6 m²	Truck Maxi 35			Truck Maxi 40		
Model version	295.AC5 + OPT 288	295.AC6 + OPT 288	295.AC7 + OPT 288	295.FC5 + OPT 288 ***	295.FC6 + OPT 288	295.FC7 + OPT 288
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	1975	1990	1990	1990	1990	1990
Payload (kg)	1525	1510	1510	1930	1930	1930
GVW (kg)	3500	3500	3500	3920	3920	3920
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	7.8-8.0	7.8-8.1	7.7-8		–	–
NEDC CO ₂ emissions (g/km)	205-211	205-213	204-212		–	–
NEDC fuel cons. (l/100 km) - 9 Speed	8.6-8.9	8.6-8.9	8.6-8.9	–	–	–
NEDC CO ₂ emissions (g/km) - 9 Speed	228-235	228-235	228-235	–	–	–

Wheelbase 3800 mm Load surface 7.3 m²	Truck Maxi 35			Truck Maxi 40		
Model version	295.LC5 + OPT 288	295.LC6 + OPT 288	295.LC7 + OPT 288	295.PC5 + OPT 288 ***	295.PC6 + OPT 288	295.PC7 + OPT 288
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2010	2025	2025	2025	2025	2025
Payload (kg)	1490	1475	1475	1980	1980	1980
GVW (kg)	3500	3500	3500	4005	4005	4005
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	7.9-8.1	7.9-8.2	7.9-8.2		–	–
NEDC CO ₂ emissions (g/km)	207-214	208-216	208-216		–	–
NEDC fuel cons. (l/100 km) - 9 Speed	8.8-9.0	8.8-9.0	8.8-9.0	–	–	–
NEDC CO ₂ emissions (g/km) - 9 Speed	231-238	231-238	231-238	–	–	–

Note: NEDC values for emission and consumption not requested for N2 homologated vehicles
*** AT9 gearbox standard

MAXI TRUCK WITH ALUMINIUM SIDE PANELS (OPT. 288)

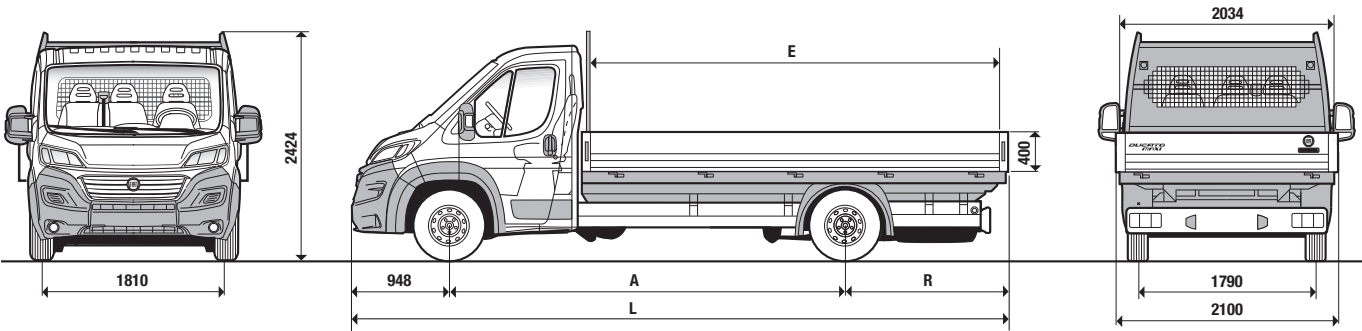


Dimensions mm	Truck Maxi 35		Truck Maxi 40	
A Wheelbase	4035	4035 XL	4035	4035 XL
L Maximum length	6328	6693	6328	6693
Maximum width	2100	2100	2100	2100
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
Maximum height (unladen)	2424	2424	2424	2424
Front overhang	948	948	948	948
R Rear overhang	1345	1710	1345	1710
E Flatbed interior length	3833	4198	3833	4198
Flatbed interior width	2034	2034	2034	2034
Side panel height	400	400	400	400

Wheelbase 4035 mm Load surface 7.8 m²	Truck Maxi 35			Truck Maxi 40		
Model version	295.BC5 + OPT 288	295.BC6 + OPT 288	295.BC7 + OPT 288	295.GC5 + OPT 288 ***	295.GC6 + OPT 288	295.GC7 + OPT 288
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2030	2045	2045	2045	2045	2045
Payload (kg)	1470	1455	1455	2055	2055	2055
GVW (kg)	3500	3500	3500	4100	4100	4100
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	7.9-8.1	7.9-8.2	7.9-8.2		–	–
NEDC CO ₂ emissions (g/km)	208-214	208-216	207-215		–	–
NEDC fuel cons. (l/100 km) - 9 Speed	8.8-9.0	8.8-9.0	8.8-9.0	–	–	–
NEDC CO ₂ emissions (g/km) - 9 Speed	231-238	231-238	231-238	–	–	–

Wheelbase 4035 mm XL Load surface 8.5 m²	Truck Maxi 35			Truck Maxi 40		
Model version	295.CC5 + OPT 288	295.CC6 + OPT 288	295.CC7 + OPT 288	295.HC5 + OPT 288 ***	295.HC6 + OPT 288	295.HC7 + OPT 288
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2065	2080	2080	2080	2080	2080
Payload (kg)	1435	1420	1420	1890	1890	1890
GVW (kg)	3500	3500	3500	3970	3970	3970
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	7.9-8.1	7.9-8.2	7.9-8.2		–	–
NEDC CO ₂ emissions (g/km)	208-214	208-217	208-217		–	–
NEDC fuel cons. (l/100 km) - 9 Speed	8.8-9.1	8.8-9.1	8.8-9.1	–	–	–
NEDC CO ₂ emissions (g/km) - 9 Speed	231-239	231-239	231-239	–	–	–

Note: NEDC values for emission and consumption not requested for N2 homologated vehicles
*** AT9 gearbox standard

CREW CAB TRUCK WITH ALUMINIUM SIDE PANELS (OPT. 288)

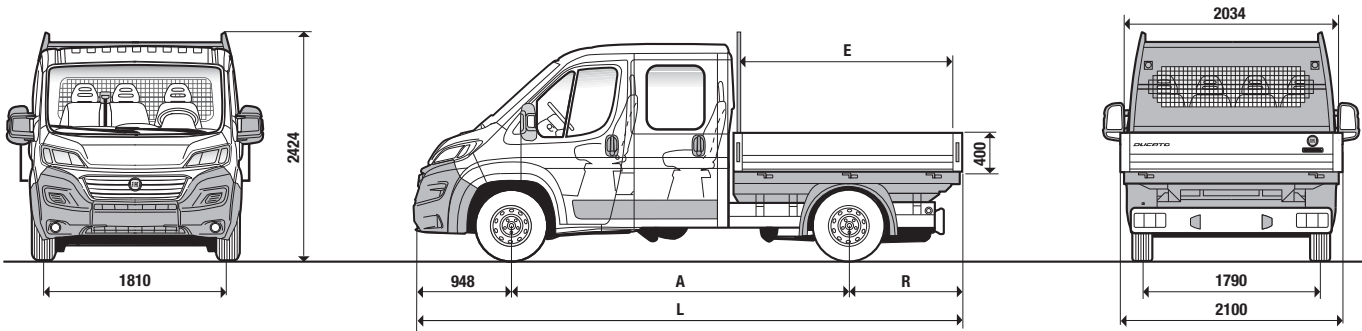


Dimensions mm	Truck 33 Crew Cab				Truck 35 Crew Cab			
A Wheelbase	3450		4035		3450		4035	
L Maximum length	5738		6228		5738		6228	
Maximum width	2100		2100		2100		2100	
Front track	1810		1810		1810		1810	
Rear track	1790		1790		1790		1790	
Maximum height (unladen)	2424		2424		2424		2424	
Front overhang	948		948		948		948	
R Rear overhang	1340		1245		1340		1245	
E Flatbed interior length	2460		2888		2398		2950	
Flatbed interior width	2034		2034		2034		2034	
Side panel height	400		400		400		400	

Wheelbase 3450 mm Load surface 4.9 m²	Truck 33 Crew Cab				Truck 35 Crew Cab			
Model version	290.5D4 + OPT 288	290.5D5 + OPT 288	290.5D6 + OPT 288	290.5D7 + OPT 288	290.AD4 + OPT 288	290.AD5 + OPT 288	290.AD6 + OPT 288	290.AD7 + OPT 288
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2075	2075	2090	2090	2075	2075	2090	2090
Payload (kg)	1175	1175	1160	1160	1245	1245	1230	1230
GVW (kg)	3250	3250	3250	3250	3320	3320	3320	3320
Top speed (km/h)	148	156	163	170	148	156	163	170
NEDC fuel cons. (l/100 km)	7.9-8.2	7.9-8.2	8.0-8.3	8.0-8.3	7.9-8.2	7.9-8.2	8.0-8.3	8.0-8.3
NEDC CO ₂ emissions (g/km)	209-215	209-216	212-221	212-221	209-215	209-216	212-221	212-221
NEDC fuel cons. (l/100 km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC
NEDC CO ₂ emissions (g/km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC

Wheelbase 4035 mm Load surface 5.9 m²	Truck 33 Crew Cab				Truck 35 Crew Cab			
Model version	290.6D4 + OPT 288	290.6D5 + OPT 288	290.6D6 + OPT 288	290.6D7 + OPT 288	290.BD4 + OPT 288	290.BD5 + OPT 288	290.BD6 + OPT 288	290.BD7 + OPT 288
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2135	2135	2150	2150	2135	2135	2150	2150
Payload (kg)	1165	1165	1150	1150	1365	1365	1350	1350
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (km/h)	148	156	163	170	148	156	163	170
NEDC fuel cons. (l/100 km)	8.0-8.3	8.0-8.3	8.1-8.4	8.1-8.4	8.0-8.3	8.0-8.3	8.1-8.4	8.1-8.4
NEDC CO ₂ emissions (g/km)	212-218	212-219	215-222	215-222	211-218	212-219	215-222	215-222
NEDC fuel cons. (l/100 km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC
NEDC CO ₂ emissions (g/km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC

MAXI CREW CAB TRUCK WITH ALUMINIUM SIDE PANELS (OPT. 288)

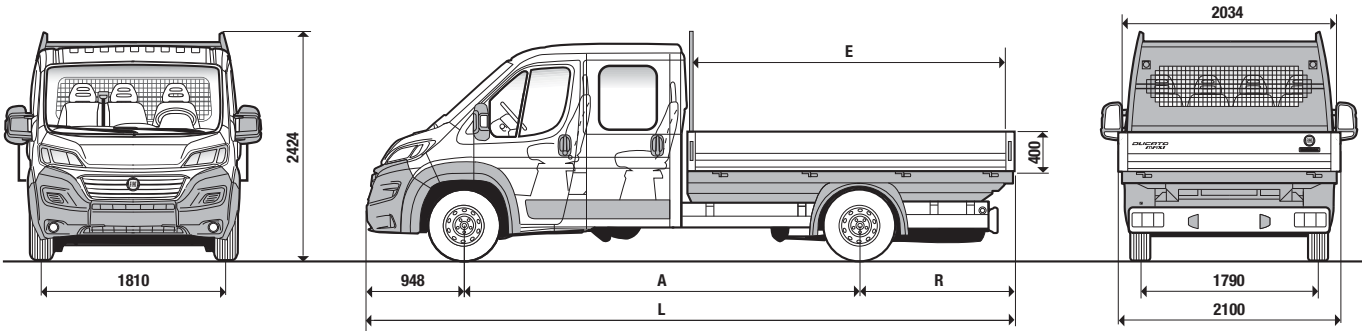

Dimensions mm	Truck Maxi 35 Crew Cab				Truck Maxi 40 Crew Cab		
A Wheelbase	3450	4035	4035 XL		3450	4035	4035 XL
L Maximum length	5738	6228	6678		5738	6228	6678
Maximum width	2100	2100	2100		2100	2100	2100
Front track	1810	1810	1810		1810	1810	1810
Rear track	1790	1790	1790		1790	1790	1790
Maximum height (unladen)	2424	2424	2424		2424	2424	2424
Front overhang	948	948	948		948	948	948
R Rear overhang	1340	1245	1695		1340	1245	1695
E Flatbed interior length	2460	2888	3338		2398	2950	3400
Flatbed interior width	2034	2034	2034		2034	2034	2034
Side panel height	400	400	400		400	400	400

Wheelbase 3450 mm Load surface 4.9 m²	Truck Maxi 35 Crew Cab			Truck Maxi 40 Crew Cab		
Model version	295.AD5 + OPT 288	295.AD6 + OPT 288	295.AD7 + OPT 288	295.FD5 + OPT 288 ***	295.FD6 + OPT 288	295.FD7 + OPT 288
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2115	2130	2130	2130	2130	2130
Payload (kg)	1385	1370	1370	1630	1630	1630
GVW (kg)	3500	3500	3500	3760	3760	3760
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	8.0-8.3	8.0-8.4	8.0-8.4		-	-
NEDC CO ₂ emissions (g/km)	212-219	210-223	210-222		-	-
NEDC fuel cons. (l/100 km) - 9 Speed	9.0-9.3	9.0-9.3	9.0-9.3	-	-	-
NEDC CO ₂ emissions (g/km) - 9 Speed	236-244	236-244	236-244	-	-	-

Wheelbase 4035 mm Load surface 5.9 m²	Truck Maxi 35 Crew Cab			Truck Maxi 40 Crew Cab		
Model version	295.BD5 + OPT 288	295.BD6 + OPT 288	295.BD7 + OPT 288	295.GD5 + OPT 288 ***	295.GD6 + OPT 288	295.GD7 + OPT 288
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2175	2190	2190	2190	2190	2190
Payload (kg)	1325	1310	1310	1980	1980	1980
GVW (kg)	3500	3500	3500	4170 *	4170 *	4170 *
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	8.1-8.3	8.1-8.5	8.1-8.5		-	-
NEDC CO ₂ emissions (g/km)	212-220	214-224	214-224		-	-
NEDC fuel cons. (l/100 km) - 9 Speed	9.0-9.3	9.0-9.3	9.0-9.3	-	-	-
NEDC CO ₂ emissions (g/km) - 9 Speed	236-245	236-245	236-245	-	-	-


Wheelbase 4035 mm XL Load surface 6.8 m²	Truck Maxi 35 Crew Cab			Truck Maxi 40 Crew Cab		
Model version	295.CD5 + OPT 288	295.CD6 + OPT 288	295.CD7 + OPT 288	295.HD5 + OPT 288 ***	295.HD6 + OPT 288	295.HD7 + OPT 288
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2215	2230	2230	2230	2230	2230
Payload (kg)	1285	1270	1270	1630	1630	1630
GVW (kg)	3500	3500	3500	3860	3860	3860
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	8.1-8.4	8.1-8.5	8.1-8.5		-	-
NEDC CO ₂ emissions (g/km)	213-220	215-224	214-224		-	-
NEDC fuel cons. (l/100 km) - 9 Speed	9.0-9.3	9.0-9.3	9.0-9.3	-	-	-
NEDC CO ₂ emissions (g/km) - 9 Speed	237-245	237-245	237-245	-	-	-

Note: NEDC values for emission and consumption not requested for N2 homologated vehicles

* GVW 4170 kg with 7 seats configuration (opt. 293)

*** AT9 gearbox standard

TRUCK WITH STEEL SIDE PANELS (OPT. 8P8)

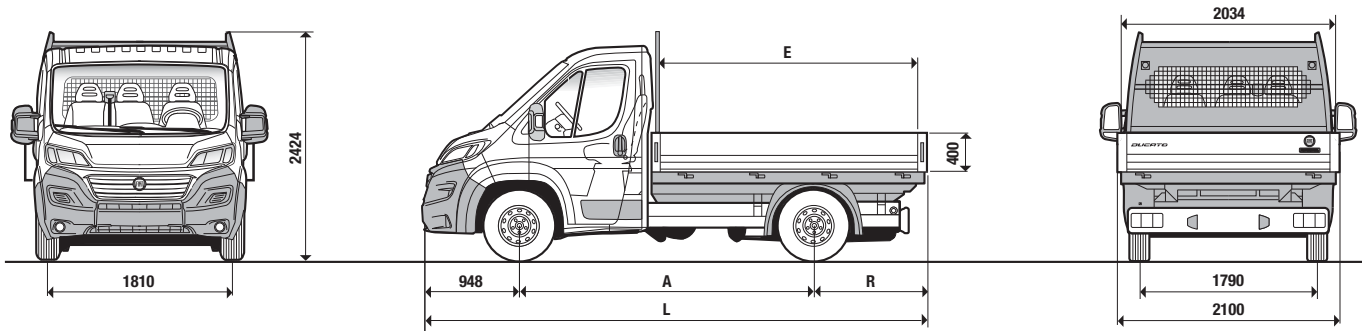


Dimensions mm	Truck 33			Truck 35		
A Wheelbase	3000	3450	3800	3000	3450	3800
L Maximum length	5293	5743	6093	5293	5743	6093
Maximum width	2100	2100	2100	2100	2100	2100
Front track	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790
Maximum height (unladen)	2424	2424	2424	2424	2424	2424
Front overhang	948	948	948	948	948	948
R Rear overhang	1345	1345	1345	1345	1345	1345
E Flatbed interior length	2798	3248	3598	2798	3248	3598
Flatbed interior width	2034	2034	2034	2034	2034	2034
Side panel height	400	400	400	400	400	400

Wheelbase 3000 mm Load surface 5.7 m²	Truck 33				Truck 35			
Model version	290.4C4 + OPT 8P8	290.4C5 + OPT 8P8	290.4C6 + OPT 8P8	290.4C7 + OPT 8P8	290.9C4 + OPT 8P8	290.9C5 + OPT 8P8	290.9C6 + OPT 8P8	290.9C7 + OPT 8P8
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2005	2005	2020	2020	2005	2005	2020	2020
Payload (kg)	1195	1195	1180	1180	1315	1315	1300	1300
GVW (kg)	3200	3200	3200	3200	3320	3320	3320	3320
Top speed (km/h)	148	156	163	170	148	156	163	170
NEDC fuel cons. (l/100 km)	8.2-8.5	8.4-8.6	7.9-8.2	7.9-8.2	8.2-8.5	8.4-8.6	7.9-8.2	7.9-8.2
NEDC CO ₂ emissions (g/km)	218-225	219-226	210-216	210-216	218-224	219-226	210-216	210-216
NEDC fuel cons. (l/100 km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC
NEDC CO ₂ emissions (g/km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC

Wheelbase 3450 mm Load surface 6.6 m²	Truck 33				Truck 35			
Model version	290.5C4 + OPT 8P8	290.5C5 + OPT 8P8	290.5C6 + OPT 8P8	290.5C7 + OPT 8P8	290.AC4 + OPT 8P8	290.AC5 + OPT 8P8	290.AC6 + OPT 8P8	290.AC7 + OPT 8P8
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2070	2070	2085	2085	2070	2070	2085	2085
Payload (kg)	1230	1230	1215	1215	1360	1360	1345	1345
GVW (kg)	3300	3300	3300	3300	3430	3430	3430	3430
Top speed (km/h)	148	156	163	170	148	156	163	170
NEDC fuel cons. (l/100 km)	7.9-8.1	7.9-8.1	8.0-8.2	8.0-8.2	7.9-8.1	7.9-8.1	8.0-8.2	8.0-8.2
NEDC CO ₂ emissions (g/km)	208-214	208-214	211-217	211-217	208-214	208-214	211-217	210-217
NEDC fuel cons. (l/100 km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC
NEDC CO ₂ emissions (g/km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC

Wheelbase 3800 mm Load surface 7.3 m²	Truck 33				Truck 35			
Model version	290.KC4 + OPT 8P8	290.KC5 + OPT 8P8	290.KC6 + OPT 8P8	290.KC7 + OPT 8P8	290.LC4 + OPT 8P8	290.LC5 + OPT 8P8	290.LC6 + OPT 8P8	290.LC7 + OPT 8P8
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2105	2105	2120	2120	2105	2105	2120	2120
Payload (kg)	1195	1195	1180	1180	1395	1395	1380	1380
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (km/h)	148	156	163	170	148	156	163	170
NEDC fuel cons. (l/100 km)	7.9-8.1	7.9-8.2	8.1-8.3	8.1-8.3	7.9-8.1	7.9-8.2	8.1-8.3	8.1-8.3
NEDC CO ₂ emissions (g/km)	208-214	208-215	213-220	213-220	208-214	208-215	213-220	213-220
NEDC fuel cons. (l/100 km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC
NEDC CO ₂ emissions (g/km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC

TRUCK WITH STEEL SIDE PANELS (OPT 8P8)

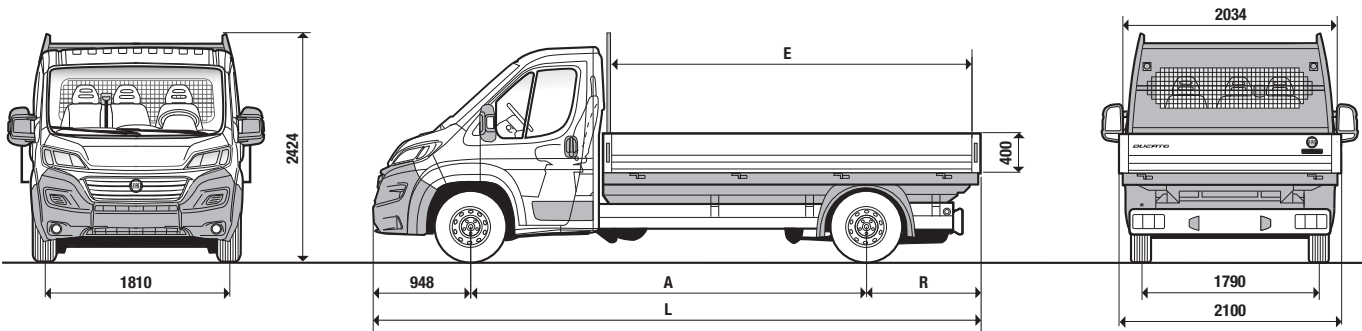


Dimensions mm	Truck 33			Truck 35		
A Wheelbase	4035	4035	4035	4035	4035	4035
L Maximum length	6328	6328	6328	6328	6328	6328
Maximum width	2100	2100	2100	2100	2100	2100
Front track	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790
Maximum height (unladen)	2424	2424	2424	2424	2424	2424
Front overhang	948	948	948	948	948	948
R Rear overhang	1345	1345	1345	1345	1345	1345
E Flatbed interior length	3833	3833	3833	3833	3833	3833
Flatbed interior width	2034	2034	2034	2034	2034	2034
Side panel height	400	400	400	400	400	400

Wheelbase 4035 mm Load surface 7.8 m²	Truck 33				Truck 35			
Model version	290.6C4 + OPT 8P8	290.6C5 + OPT 8P8	290.6C6 + OPT 8P8	290.6C7 + OPT 8P8	290.BC4 + OPT 8P8	290.BC5 + OPT 8P8	290.BC6 + OPT 8P8	290.BC7 + OPT 8P8
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2130	2130	2145	2145	2130	2130	2145	2145
Payload (kg)	1170	1170	1155	1155	1370	1370	1355	1355
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (km/h)	148	156	163	170	148	156	163	170
NEDC fuel cons. (l/100 km)	8.0-8.2	8.0-8.3	8.1-8.3	8.1-8.3	8.0-8.2	8.0-8.3	8.1-8.3	8.1-8.3
NEDC CO ₂ emissions (g/km)	210-217	211-217	213-220	213-220	210-217	211-217	213-220	213-220
NEDC fuel cons. (l/100 km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC
NEDC CO ₂ emissions (g/km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC

Wheelbase 4035 mm XL Load surface 8.5 m²	Truck 35			
Model version	290.CC4 + OPT 8P8	290.CC5 + OPT 8P8	290.CC6 + OPT 8P8	290.CC7 + OPT 8P8
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2180	2180	2195	2195
Payload (kg)	1320	1320	1305	1305
GVW (kg)	3500	3500	3500	3500
Top speed (km/h)	148	156	163	170
NEDC fuel cons. (l/100 km)	8.0-8.3	8.0-8.3	8.1-8.3	8.1-8.3
NEDC CO ₂ emissions (g/km)	211-217	211-218	214-221	214-221
NEDC fuel cons. (l/100 km) - 9 Speed		TBC	TBC	TBC
NEDC CO ₂ emissions (g/km) - 9 Speed		TBC	TBC	TBC

MAXI TRUCK WITH STEEL SIDE PANELS (OPT. 8P8)

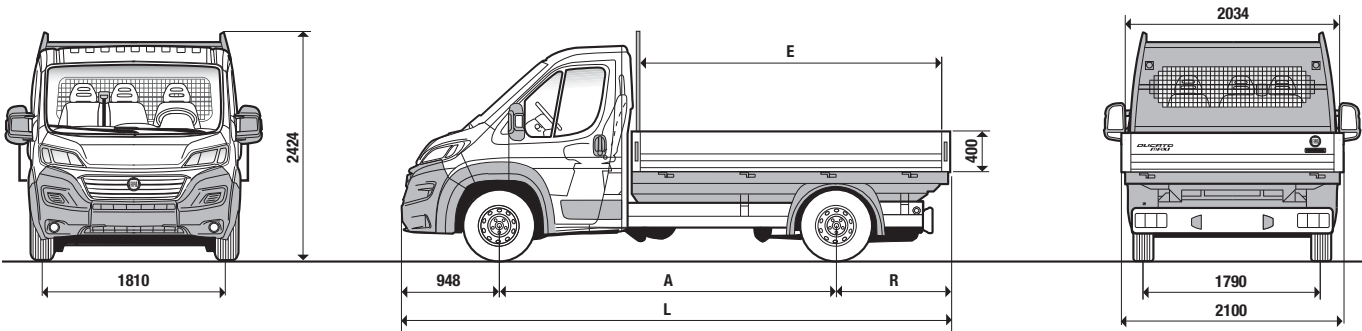

Dimensions mm	Truck Maxi 35		Truck Maxi 40	
A Wheelbase	3450	3800	3450	3800
L Maximum length	5743	6093	5743	6093
Maximum width	2100	2100	2100	2100
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
Maximum height (unladen)	2424	2424	2424	2424
Front overhang	948	948	948	948
R Rear overhang	1345	1345	1345	1345
E Flatbed interior length	3248	3660	3248	3598
Flatbed interior width	2034	2034	2034	2034
Side panel height	400	400	400	400


Wheelbase 3000 mm Load surface 5.7 m²	Truck Maxi 35		
Model version	295.9C5 + OPT 8P8	295.9C6 + OPT 8P8	295.9C7 + OPT 8P8
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2045	2060	2060
Payload (kg)	1455	1440	1440
GVW (kg)	3500	3500	3500
Top speed (km/h)	156	161	161
NEDC fuel cons. (l/100 km)	7.9-8.1	7.9-8.2	7.9-8.2
NEDC CO ₂ emissions (g/km)	208-214	208-216	208-216
NEDC fuel cons. (l/100 km) - 9 Speed	8.8-9.1	8.8-9.1	8.8-9.1
NEDC CO ₂ emissions (g/km) - 9 Speed	231-238	231-238	231-238

Wheelbase 3450 mm Load surface 6.6 m²	Truck Maxi 35			Truck Maxi 40		
Model version	295.AC5 + OPT 8P8	295.AC6 + OPT 8P8	295.AC7 + OPT 8P8	295.FC5 + OPT 8P8 ***	295.FC6 + OPT 8P8	295.FC7 + OPT 8P8
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2110	2125	2125	2125	2125	2125
Payload (kg)	1390	1375	1375	1795	1795	1795
GVW (kg)	3500	3500	3500	3920	3920	3920
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	7.9-8.2	8.0-8.4	7.9-8.4	—	—	—
NEDC CO ₂ emissions (g/km)	208-215	212-221	208-221	—	—	—
NEDC fuel cons. (l/100 km) - 9 Speed	8.9-9.2	8.9-9.2	8.9-9.2	—	—	—
NEDC CO ₂ emissions (g/km) - 9 Speed	235-242	235-242	235-242	—	—	—

Wheelbase 3800 mm Load surface 7.3 m²	Truck Maxi 35			Truck Maxi 40		
Model version	295.LC5 + OPT 8P8	295.LC6 + OPT 8P8	295.LC7 + OPT 8P8	295.PC5 + OPT 8P8 ***	295.PC6 + OPT 8P8	295.PC7 + OPT 8P8
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2145	2160	2160	2160	2160	2160
Payload (kg)	1355	1340	1340	1845	1845	1845
GVW (kg)	3500	3500	3500	4005	4005	4005
Top speed (km/h)	155	157	161	155	157	161
NEDC fuel cons. (l/100 km)	8.0-8.3	8.1-8.4	8.0-8.4	—	—	—
NEDC CO ₂ emissions (g/km)	211-218	212-221	212-221	—	—	—
NEDC fuel cons. (l/100 km) - 9 Speed	8.9-9.2	8.9-9.2	8.9-9.2	—	—	—
NEDC CO ₂ emissions (g/km) - 9 Speed	235-242	235-242	235-242	—	—	—

Note: NEDC values for emission and consumption not requested for N2 homologated vehicles
*** AT9 gearbox standard

MAXI TRUCK WITH STEEL SIDE PANELS (OPT 8P8)

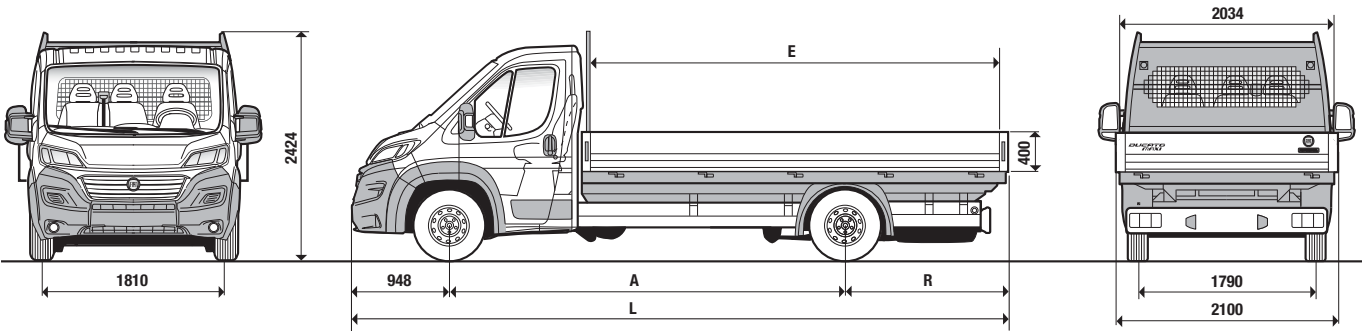


Dimensions mm	Truck Maxi 35		Truck Maxi 40	
A Wheelbase	4035	4035 XL	4035	4035 XL
L Maximum length	6328	6693	6328	6693
Maximum width	2100	2100	2100	2100
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
Maximum height (unladen)	2424	2424	2424	2424
Front overhang	948	948	948	948
R Rear overhang	1345	1710	1345	1710
E Flatbed interior length	3833	4198	3833	4198
Flatbed interior width	2034	2034	2034	2034
Side panel height	400	400	400	400

Wheelbase 4035 mm Load surface 7.8 m²	Truck Maxi 35			Truck Maxi 40		
Model version	295.BC5 + OPT 8P8	295.BC6 + OPT 8P8	295.BC7 + OPT 8P8	295.GC5 + OPT 8P8 ***	295.GC6 + OPT 8P8	295.GC7 + OPT 8P8
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2170	2185	2185	2185	2185	2185
Payload (kg)	1330	1315	1315	1915	1915	1915
GVW (kg)	3500	3500	3500	4100	4100	4100
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	8.0-8.3	8.1-8.4	8.0-8.4	—	—	—
NEDC CO ₂ emissions (g/km)	211-218	213-222	212-222	—	—	—
NEDC fuel cons. (l/100 km) - 9 Speed	8.9-9.2	8.9-9.2	8.9-9.2	—	—	—
NEDC CO ₂ emissions (g/km) - 9 Speed	235-243	235-243	235-243	—	—	—

Wheelbase 4035 mm XL Load surface 8.5 m²	Truck Maxi 35			Truck Maxi 40		
Model version	295.CC5 + OPT 8P8	295.CC6 + OPT 8P8	295.CC7 + OPT 8P8	295.HC5 + OPT 8P8 ***	295.HC6 + OPT 8P8	295.HC7 + OPT 8P8
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2220	2235	2235	2235	2235	2235
Payload (kg)	1280	1265	1265	1735	1735	1735
GVW (kg)	3500	3500	3500	3970	3970	3970
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	8.0-8.3	8.1-8.4	8.1-8.4	—	—	—
NEDC CO ₂ emissions (g/km)	212-219	213-222	213-222	—	—	—
NEDC fuel cons. (l/100 km) - 9 Speed	8.9-9.3	8.9-9.3	9.0-9.3	—	—	—
NEDC CO ₂ emissions (g/km) - 9 Speed	236-244	236-244	236-244	—	—	—

Note: NEDC values for emission and consumption not requested for N2 homologated vehicles
*** AT9 gearbox standard

CREW CAB TRUCK WITH STEEL SIDE PANELS (OPT. 8P8)

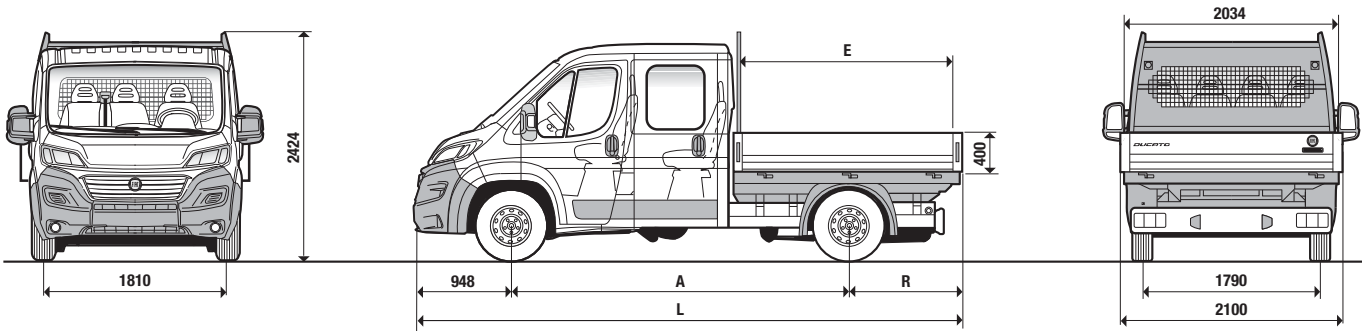


Dimensions mm	Truck 33 Crew Cab				Truck 35 Crew Cab			
A Wheelbase	3450		4035		3450		4035	
L Maximum length	5738		6228		5738		6228	
Maximum width	2100		2100		2100		2100	
Front track	1810		1810		1810		1810	
Rear track	1790		1790		1790		1790	
Maximum height (unladen)	2424		2424		2424		2424	
Front overhang	948		948		948		948	
R Rear overhang	1340		1245		1340		1245	
E Flatbed interior length	2460		2888		2398		2950	
Flatbed interior width	2034		2034		2034		2034	
Side panel height	400		400		400		400	

Wheelbase 3450 mm Load surface 4.9 m²	Truck 33 Crew Cab				Truck 35 Crew Cab			
Model version	290.5D4 + OPT 8P8	290.5D5 + OPT 8P8	290.5D6 + OPT 8P8	290.5D7 + OPT 8P8	290.AD4 + OPT 8P8	290.AD5 + OPT 8P8	290.AD6 + OPT 8P8	290.AD7 + OPT 8P8
Engine	120 MultiJet ₂	130 MultiJet ₂	150 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	130 MultiJet ₂	150 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2215	2215	2230	2230	2215	2215	2230	2230
Payload (kg)	1035	1035	1020	1020	1105	1105	1090	1090
GVW (kg)	3250	3250	3250	3250	3320	3320	3320	3320
Top speed (km/h)	148	156	163	170	148	156	163	170
NEDC fuel cons. (l/100 km)	8.1-8.3	8.1-8.4	8.1-8.4	8.1-8.4	8.1-8.3	8.1-8.4	8.1-8.4	8.1-8.4
NEDC CO ₂ emissions (g/km)	212-219	213-220	215-223	215-223	212-219	213-220	215-223	215-223
NEDC fuel cons. (l/100 km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC
NEDC CO ₂ emissions (g/km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC

Wheelbase 4035 mm Load surface 5.9 m²	Truck 33 Crew Cab				Truck 35 Crew Cab			
Model version	290.6D4 + OPT 8P8	290.6D5 + OPT 8P8	290.6D6 + OPT 8P8	290.6D7 + OPT 8P8	290.BD4 + OPT 8P8	290.BD5 + OPT 8P8	290.BD6 + OPT 8P8	290.BD7 + OPT 8P8
Engine	120 MultiJet ₂	130 MultiJet ₂	150 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	130 MultiJet ₂	150 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2280	2280	2295	2295	2280	2280	2295	2295
Payload (kg)	1020	1020	1005	1005	1220	1220	1205	1205
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (km/h)	148	156	163	170	148	156	163	170
NEDC fuel cons. (l/100 km)	8.1-8.4	8.1-8.4	8.2-8.5	8.2-8.5	8.1-8.4	8.1-8.4	8.2-8.5	8.2-8.5
NEDC CO ₂ emissions (g/km)	213-220	213-221	216-224	216-224	213-220	213-221	216-224	216-224
NEDC fuel cons. (l/100 km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC
NEDC CO ₂ emissions (g/km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC

MAXI CREW CAB TRUCK WITH STEEL SIDE PANELS (OPT 8P8)

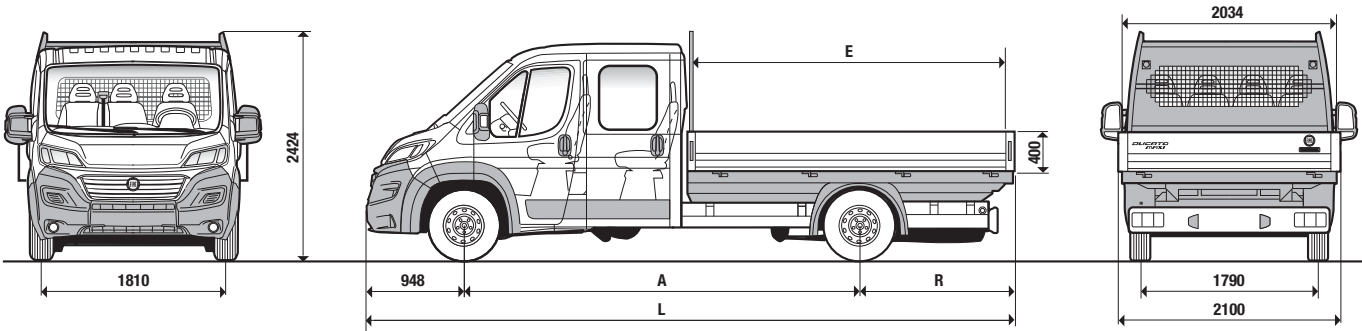

Dimensions mm	Truck Maxi 35 Crew Cab				Truck Maxi 40 Crew Cab		
A Wheelbase	3450	4035	4035 XL		3450	4035	4035 XL
L Maximum length	5738	6228	6678		5738	6228	6678
Maximum width	2100	2100	2100		2100	2100	2100
Front track	1810	1810	1810		1810	1810	1810
Rear track	1790	1790	1790		1790	1790	1790
Maximum height (unladen)	2424	2424	2424		2424	2424	2424
Front overhang	948	948	948		948	948	948
R Rear overhang	1340	1245	1695		1340	1245	1695
E Flatbed interior length	2460	2888	3338		2398	2950	3400
Flatbed interior width	2034	2034	2034		2034	2034	2034
Side panel height	400	400	400		400	400	400

Wheelbase 3450 mm Load surface 4.9 m²	Truck Maxi 35 Crew Cab			Truck Maxi 40 Crew Cab		
Model version	295.AD5 + OPT 8P8	295.AD6 + OPT 8P8	295.AD7 + OPT 8P8	295.FD5 + OPT 8P8 ***	295.FD6 + OPT 8P8	295.FD7 + OPT 8P8
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2255	2270	2270	2270	2270	2270
Payload (kg)	1245	1230	1230	1490	1490	1490
GVW (kg)	3500	3500	3500	3760	3760	3760
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	8.1-8.4	8.2-8.5	8.1-8.5		-	-
NEDC CO ₂ emissions (g/km)	213-221	215-225	214-225		-	-
NEDC fuel cons. (l/100 km) - 9 Speed	9-9.4	9-9.4	9-9.4	-	-	-
NEDC CO ₂ emissions (g/km) - 9 Speed	237-246	237-246	237-246	-	-	-

Wheelbase 4035 mm Load surface 5.9 m²	Truck Maxi 35 Crew Cab			Truck Maxi 40 Crew Cab		
Model version	295.BD5 + OPT 8P8	295.BD6 + OPT 8P8	295.BD7 + OPT 8P8	295.GD5 + OPT 8P8 ***	295.GD6 + OPT 8P8	295.GD7 + OPT 8P8
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2320	2335	2335	2335	2335	2335
Payload (kg)	1180	1165	1165	1765	1765	1765
GVW (kg)	3500	3500	3500	4100 *	4100 *	4100 *
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	8.1-8.4	8.2-8.6	8.2-8.6		-	-
NEDC CO ₂ emissions (g/km)	214-222	216-226	215-225		-	-
NEDC fuel cons. (l/100 km) - 9 Speed	9.0-9.4	9.0-9.4	9.0-9.4	-	-	-
NEDC CO ₂ emissions (g/km) - 9 Speed	238-247	238-247	238-247	-	-	-


Wheelbase 4035 mm XL Load surface 6.8 m²	Truck Maxi 35 Crew Cab			Truck Maxi 40 Crew Cab		
Model version	295.CD5 + OPT 8P8	295.CD6 + OPT 8P8	295.CD7 + OPT 8P8	295.HD5 + OPT 8P8 ***	295.HD6 + OPT 8P8	295.HD7 + OPT 8P8
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2370	2385	2385	2385	2385	2385
Payload (kg)	1130	1115	1115	1475	1475	1475
GVW (kg)	3500	3500	3500	3860	3860	3860
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	8.1-8.4	8.2-8.6	8.2-8.6		-	-
NEDC CO ₂ emissions (g/km)	214-222	216-227	216-227		-	-
NEDC fuel cons. (l/100 km) - 9 Speed	9.1-9.4	9.1-9.4	9.1-9.4	-	-	-
NEDC CO ₂ emissions (g/km) - 9 Speed	239-248	239-248	239-248	-	-	-

Note: NEDC values for emission and consumption not requested for N2 homologated vehicles

* GVW 4170 kg with 7 seats configuration (opt. 293)

*** AT9 gearbox standard

TRUCK 3-WAY TIPPER (OPT. 8P7)

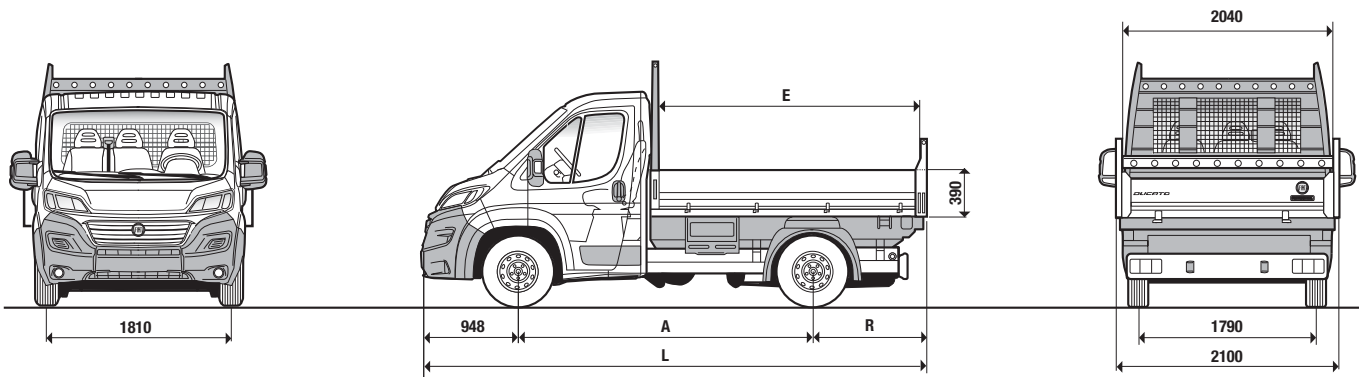


Dimensions mm	3-Way Tipper 33				3-Way Tipper 35			
	Single cab	Single cab	Single cab	Single cab	Single cab	Single cab	Single cab	Single cab
A Wheelbase	3000	3450	3800	4035	3000	3450	3800	4035
L Maximum length	5028	5578	5828	6128	5028	5578	5828	6128
Maximum width	2100	2100	2100	2100	2100	2100	2100	2100
Front track	1810	1810	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790	1790	1790
Front overhang	948	948	948	948	948	948	948	948
R Rear overhang	1080	1340	1080	1145	1080	1340	1080	1145
E Flatbed interior length	2525	3075	3325	3625	2525	3075	3325	3625
Flatbed interior width	2040	2040	2040	2040	2040	2040	2040	2040
Side panel height	390	390	390	390	390	390	390	390

Wheelbase 3000 mm Load surface 5.1 m²		3-Way Tipper 33				3-Way Tipper 35			
Model version		290.4C4 + OPT 8P7	290.4C5 + OPT 8P7	290.4C6 + OPT 8P7	290.4C7 + OPT 8P7	290.9C4 + OPT 8P7	290.9C5 + OPT 8P7	290.9C6 + OPT 8P7	290.9C7 + OPT 8P7
Engine		120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)		2333	2333	2348	2348	2333	2333	2348	2348
Payload (kg)		867	867	852	852	987	987	972	972
GVW (kg)		3200	3200	3200	3200	3320	3320	3320	3320
Top speed (km/h)		148	156	163	170	148	156	163	170
NEDC fuel cons. (l/100 km)		8.1-8.4	2.1-8.4	8.1-8.4	8.1-8.4	8.1-8.4	8.1-8.4	8.1-8.4	8.1-8.4
NEDC CO ₂ emissions (g/km)		212-219	213-220	215-223	215-223	212-219	213-220	215-223	215-223
NEDC fuel cons. (l/100 km) - 9 Speed			TBC	TBC	TBC		TBC	TBC	TBC
NEDC CO ₂ emissions (g/km) - 9 Speed			TBC	TBC	TBC		TBC	TBC	TBC

Wheelbase 3450 mm Load surface 6.3 m²		3-Way Tipper 33				3-Way Tipper 35			
Model version		290.5C4 + OPT 8P7	290.5C5 + OPT 8P7	290.5C6 + OPT 8P7	290.5C7 + OPT 8P7	290.AC4 + OPT 8P7	290.AC5 + OPT 8P7	290.AC6 + OPT 8P7	290.AC7 + OPT 8P7
Engine		120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)		2378	2378	2393	2393	2378	2378	2393	2393
Payload (kg)		922	922	907	907	1052	1052	1037	1037
GVW (kg)		3300	3300	3300	3300	3430	3430	3430	3430
Top speed (km/h)		148	156	163	170	148	156	163	170
NEDC fuel cons. (l/100 km)		8.1-8.4	8.1-8.4	8.2-8.4	8.2-8.4	8.1-8.4	8.1-8.4	8.1-8.4	8.2-8.4
NEDC CO ₂ emissions (g/km)		213-220	213-221	216-224	216-224	213-220	213-221	216-224	216-224
NEDC fuel cons. (l/100 km) - 9 Speed			TBC	TBC	TBC		TBC	TBC	TBC
NEDC CO ₂ emissions (g/km) - 9 Speed			TBC	TBC	TBC		TBC	TBC	TBC


Wheelbase 3800 mm Load surface 6.8 m²		3-Way Tipper 33				3-Way Tipper 35			
Model version		290.KC4 + OPT 8P7	290.KC5 + OPT 8P7	290.KC6 + OPT 8P7	290.KC7 + OPT 8P7	290.LC4 + OPT 8P7	290.LC5 + OPT 8P7	290.LC6 + OPT 8P7	290.LC7 + OPT 8P7
Engine		120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)		2413	2413	2428	2428	2413	2413	2428	2428
Payload (kg)		887	887	872	872	1087	1087	1072	1072
GVW (kg)		3300	3300	3300	3300	3500	3500	3500	3500
Top speed (km/h)		148	155	157	171	148	155	157	171
NEDC fuel cons. (l/100 km)		8.1-8.4	8.1-8.4	8.2-8.5	8.2-8.5	8.1-8.4	8.1-8.4	8.2-8.5	8.2-8.5
NEDC CO ₂ emissions (g/km)		213-220	214-221	216-224	216-224	213-220	213-221	216-224	216-224
NEDC fuel cons. (l/100 km) - 9 Speed			TBC	TBC	TBC		TBC	TBC	TBC
NEDC CO ₂ emissions (g/km) - 9 Speed			TBC	TBC	TBC		TBC	TBC	TBC

TRUCK 3-WAY TIPPER (OPT. 8P7)

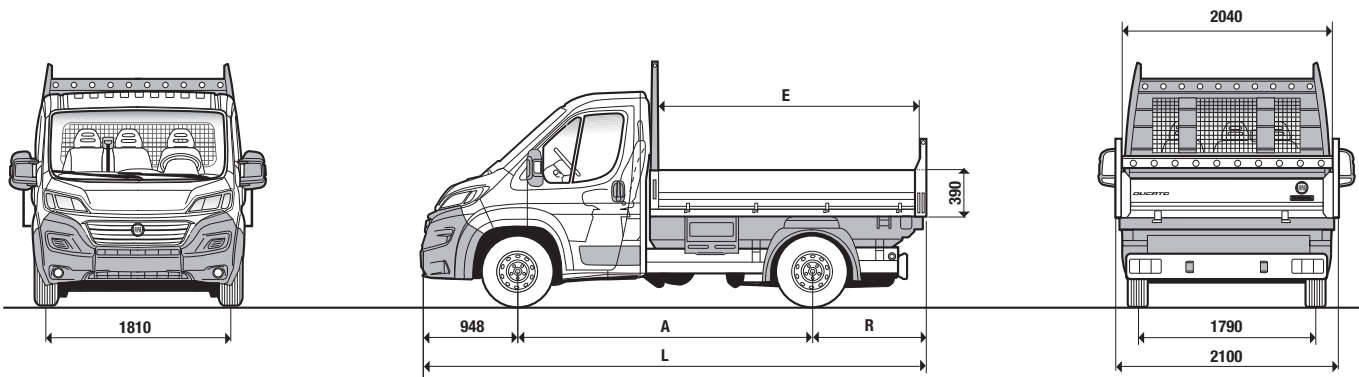

Wheelbase 4035 mm Load surface 7.4 m²		3-Way Tipper 33				3-Way Tipper 35			
Model version		290.6C4 + OPT 8P7	290.6C5 + OPT 8P7	290.6C6 + OPT 8P7	290.6C7 + OPT 8P7	290.BC4 + OPT 8P7	290.BC5 + OPT 8P7	290.BC6 + OPT 8P7	290.BC7 + OPT 8P7
Engine		120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)		2433	2433	2448	2448	2433	2433	2448	2448
Payload (kg)		867	867	852	852	1067	1067	1052	1052
GVW (kg)		3300	3300	3300	3300	3500	3500	3500	3500
Top speed (km/h)		148	155	157	171	148	155	157	171
NEDC fuel cons. (l/100 km)		8.1-8.4	8.1-8.4	8.2-8.5	8.2-8.5	8.1-8.4	8.1-8.4	8.2-8.5	8.2-8.5
NEDC CO ₂ emissions (g/km)		213-221	214-222	216-225	216-225	213-221	214-222	216-225	216-225
NEDC fuel cons. (l/100 km) - 9 Speed			TBC	TBC	TBC		TBC	TBC	TBC
NEDC CO ₂ emissions (g/km) - 9 Speed			TBC	TBC	TBC		TBC	TBC	TBC

MAXI TRUCK 3-WAY TIPPER (OPT. 8P7)

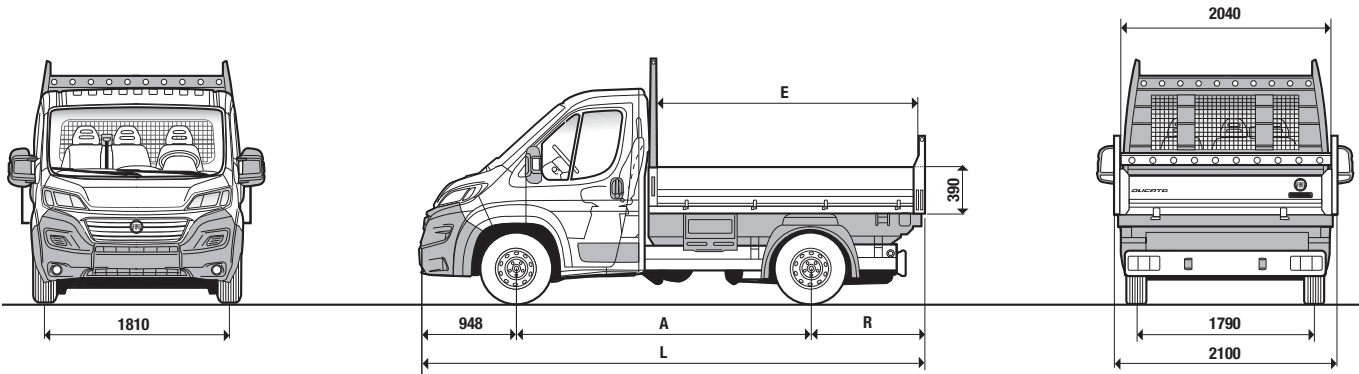

Dimensions mm	3-Way Tipper Maxi 35			3-Way Tipper Maxi 40		
	Single cab	Single cab	Single cab	Single cab	Single cab	Single Cab
A Wheelbase	3450	3800	4035	3450	3800	4035
L Maximum length	5578	5828	6123	5578	5828	6123
Maximum width	2100	2100	2100	2100	2100	2100
Front track	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790
Front overhang	948	948	948	948	948	948
R Rear overhang	1340	1080	1145	1340	1080	1145
E Flatbed interior length	3075	3325	3625	3075	3325	3625
Flatbed interior width	2040	2040	2040	2040	2040	2040
Side panel height	390	390	390	390	390	390

Wheelbase 3450 mm Load surface 6.3 m²	3-Way Tipper Maxi 35			3-Way Tipper Maxi 40		
	295.AC5 + OPT 8P7	295.AC6 + OPT 8P7	295.AC7 + OPT 8P7	295.FC5 + OPT 8P7 ***	295.FC6 + OPT 8P7	295.FC7 + OPT 8P7
Model version						
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2418	2433	2433	2433	2433	2433
Payload (kg)	1082	1067	1067	1487	1487	1487
GVW (kg)	3500	3500	3500	3920	3920	3920
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	8.1-8.4	8.2-8.6	8.2-8.6		-	-
NEDC CO ₂ emissions (g/km)	213-221	216-226	215-226		-	-
NEDC fuel cons. (l/100 km) - 9 Speed	9-9.4	9-9.4	9-9.4	-	-	-
NEDC CO ₂ emissions (g/km) - 9 Speed	238-247	238-247	238-247	-	-	-

Wheelbase 3800 mm Load surface 6.8 m²	3-Way Tipper Maxi 35			3-Way Tipper Maxi 40		
	295.LC5 + OPT 8P7	295.LC6 + OPT 8P7	295.LC7 + OPT 8P7	295.PC5 + OPT 8P7 ***	295.PC6 + OPT 8P7	295.PC7 + OPT 8P7
Model version						
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2453	2468	2468	2468	2468	2468
Payload (kg)	1047	1032	1032	1632	1632	1632
GVW (kg)	3500	3500	3500	4100 **	4100 **	4100 **
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	8.1-8.4	8.2-8.6	8.2-8.6		-	-
NEDC CO ₂ emissions (g/km)	214-222	216-227	216-227		-	-
NEDC fuel cons. (l/100 km) - 9 Speed	9.0-9.4	9.0-9.4	9.0-9.4	-	-	-
NEDC CO ₂ emissions (g/km) - 9 Speed	238-247	238-247	238-247	-	-	-


Wheelbase 4035 mm Load surface 7.4 m²	3-Way Tipper Maxi 35			3-Way Tipper Maxi 40		
	295.BC5 + OPT 8P7	295.BC6 + OPT 8P7	295.BC7 + OPT 8P7	295.GC5 + OPT 8P7 ***	295.GC6 + OPT 8P7	295.GC7 + OPT 8P7
Model version						
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2473	2488	2488	2488	2488	2488
Payload (kg)	1027	1012	1012	1682	1682	1682
GVW (kg)	3500	3500	3500	4170	4170	4170
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	8.1-8.4	8.2-8.6	8.2-8.6		-	-
NEDC CO ₂ emissions (g/km)	214-222	216-227	216-227		-	-
NEDC fuel cons. (l/100 km) - 9 Speed	9.1-9.4	9.1-9.4	9.1-9.4	-	-	-
NEDC CO ₂ emissions (g/km) - 9 Speed	238-248	238-248	238-248	-	-	-

Note: NEDC values for emission and consumption not requested for N2 homologated vehicles

** GVW 4170 kg with 3 seats configuration (opt. 293)

*** AT9 gearbox standardj38


CREW CAB TRUCK 3-WAY TIPPER (OPT 8P7)

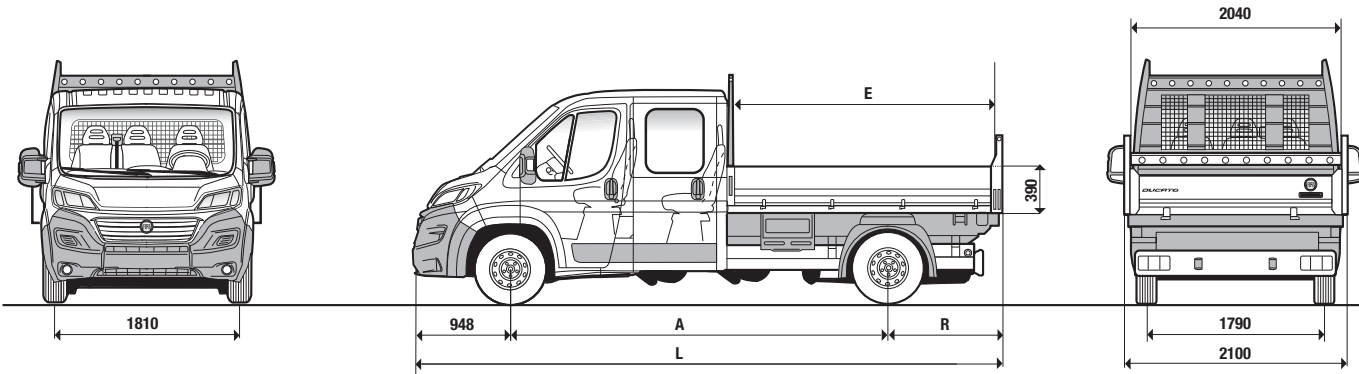

Dimensions mm	3-Way Tipper 35	
	Single cab	Crew cab
A Wheelbase	3450	4035
L Maximum length	6123	6123
Maximum width	2100	2100
Front track	1810	1810
Rear track	1790	1790
Front overhang	948	948
R Rear overhang	1245	1245
E Flatbed interior length	2750	2750
Flatbed interior width	2040	2040
Side panel height	390	390

Wheelbase 4035 mm Load surface 5.6 m²	3-Way Tipper 35 Crew Cab			
	290.BD4 + OPT 8P7	290.BD5 + OPT 8P7	290.BD6 + OPT 8P7	290.BD7 + OPT 8P7
Model version				
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2578	2578	2593	2593
Payload (kg)	922	922	907	907
GVW (kg)	3500	3500	3500	3500
Top speed (km/h)	148	156	163	170
NEDC fuel cons. (l/100 km)	8.2-8.4	8.2-8.6	8.3-8.6	8.3-8.6
NEDC CO ₂ emissions (g/km)	215-220	216-225	219-228	219-228
NEDC fuel cons. (l/100 km) - 9 Speed		TBC	TBC	TBC
NEDC CO ₂ emissions (g/km) - 9 Speed		TBC	TBC	TBC

MAXI CREW CAB TRUCK 3-WAY TIPPER (OPT. 8P7)

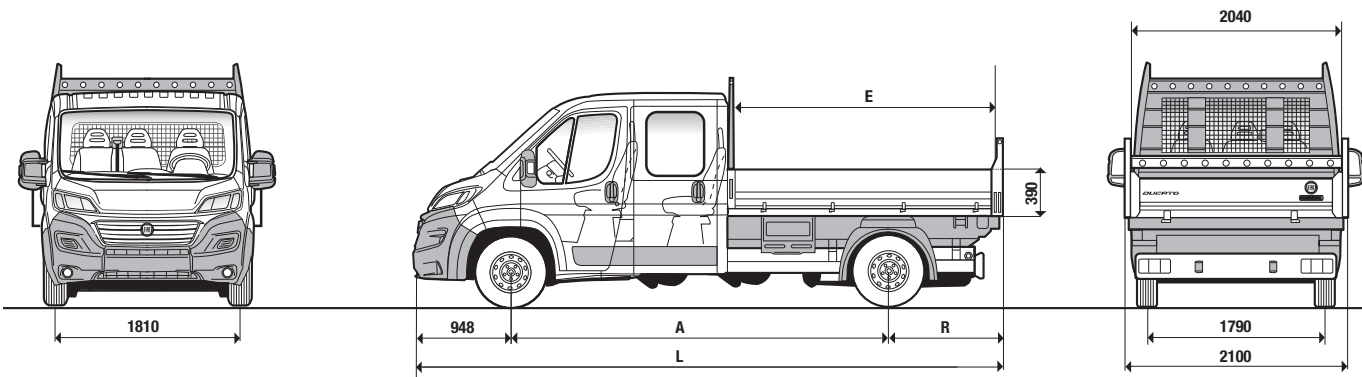


Dimensions mm	3-Way Tipper Maxi 35		3-Way Tipper Maxi 40	
	Crew cab	Crew cab	Crew cab	Crew cab
A Wheelbase	4035	4035 XL	4035	4035 XL
L Maximum length	6123	6448	6123	6448
Maximum width	2100	2100	2100	2100
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
Front overhang	948	948	948	948
R Rear overhang	1245	1695	1245	1695
E Flatbed interior length	2750	3075	2750	3075
Flatbed interior width	2040	2040	2040	2040
Side panel height	390	390	390	390

Wheelbase 4035 mm Load surface 5.6 m²	3-Way Tipper Maxi 35 Crew Cab			3-Way Tipper Maxi 40 Crew Cab		
Model version	295.BD5 + OPT 8P7	295.BD6 + OPT 8P7	295.BD7 + OPT 8P7	295.GD5 + OPT 8P7 ***	295.GD6 + OPT 8P7	295.GD7 + OPT 8P7
Engine	140 MultiJet₂	160 MultiJet₂	180 MultiJet₂	140 MultiJet₂	160 MultiJet₂	180 MultiJet₂
Kerb weight (kg)	2618	2633	2633	2633	2633	2633
Payload (kg)	882	867	867	1287	1287	1287
GVW (kg)	3500	3500	3500	3920	3920	3920
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	8.2-8.6	8.3-8.8	8.3-8.8		–	–
NEDC CO₂ emissions (g/km)	216-226	219-231	219-231		–	–
NEDC fuel cons. (l/100 km) - 9 Speed	9.2-9.6	9.2-9.6	9.2-9.6	–	–	–
NEDC CO₂ emissions (g/km) - 9 Speed	241-252	241-252	241-252	–	–	–

Wheelbase 4035 mm XL Load surface 6.3 m²	3-Way Tipper Maxi 35 Crew Cab			3-Way Tipper Maxi 40 Crew Cab		
Model version	295.CD5 + OPT 8P7	295.CD6 + OPT 8P7	295.CD7 + OPT 8P7	295.HD5 + OPT 8P7 ***	295.HD6 + OPT 8P7	295.HD7 + OPT 8P7
Engine	140 MultiJet₂	160 MultiJet₂	180 MultiJet₂	140 MultiJet₂	160 MultiJet₂	180 MultiJet₂
Kerb weight (kg)	2658	2673	2673	2673	2673	2673
Payload (kg)	842	827	827	1492	1492	1492
GVW (kg)	3500	3500	3500	4165	4165	4165
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	8.2-8.6	8.3-8.8	8.3-8.8		–	–
NEDC CO₂ emissions (g/km)	217-226	220-232	220-232		–	–
NEDC fuel cons. (l/100 km) - 9 Speed	9.2-9.6	9.2-9.6	9.2-9.6	–	–	–
NEDC CO₂ emissions (g/km) - 9 Speed	242-252	242-252	242-252	–	–	–

Note: NEDC values for emission and consumption not requested for N2 homologated vehicles
*** AT9 gearbox standard

TRUCK 1-WAY TIPPER (OPT. 4G5)

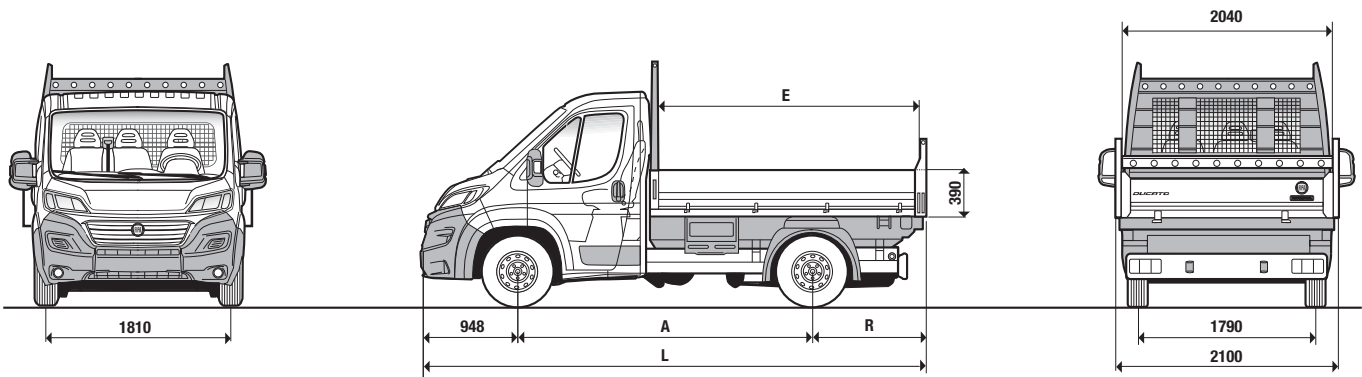


Dimensions mm	1-Way Tipper 33				1-Way Tipper 35			
	Single cab	Single cab	Single cab	Single cab	Single cab	Single cab	Single cab	Single cab
A Wheelbase	3000	3450	3800	4035	3000	3450	3800	4035
L Maximum length	5028	5578	5828	6128	5028	5578	5828	6128
Maximum width	2100	2100	2100	2100	2100	2100	2100	2100
Front track	1810	1810	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790	1790	1790
Front overhang	948	948	948	948	948	948	948	948
R Rear overhang	1080	1340	1080	1145	1080	1340	1080	1145
E Flatbed interior length	2525	3075	3325	3625	2525	3075	3325	3625
Flatbed interior width	2040	2040	2040	2040	2040	2040	2040	2040
Side panel height	390	390	390	390	390	390	390	390

Wheelbase 3000 mm Load surface 5.1 m²	1-Way Tipper 33				1-Way Tipper 35			
Model version	290.4C4 + OPT 4G5	290.4C5 + OPT 4G5	290.4C6 + OPT 4G5	290.4C7 + OPT 4G5	290.9C4 + OPT 4G5	290.9C5 + OPT 4G5	290.9C6 + OPT 4G5	290.9C7 + OPT 4G5
Engine	120 MultiJet₂	140 MultiJet₂	160 MultiJet₂	180 MultiJet₂	120 MultiJet₂	140 MultiJet₂	160 MultiJet₂	180 MultiJet₂
Kerb weight (kg)	2263	2263	2278	2278	2263	2263	2278	2278
Payload (kg)	937	937	922	922	1057	1057	1042	1042
GVW (kg)	3200	3200	3200	3200	3320	3320	3320	3320
Top speed (km/h)	148	156	163	170	148	156	163	170
NEDC fuel cons. (l/100 km)	8.4-8.7	8.5-8.8	8.1-8.4	8.1-8.4	8.4-8.7	8.5-8.8	8.1-8.4	8.1-8.4
NEDC CO₂ emissions (g/km)	223-230	224-232	215-222	215-222	223-230	224-232	215-222	215-222
NEDC fuel cons. (l/100 km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC
NEDC CO₂ emissions (g/km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC

Wheelbase 3450 mm Load surface 6.3 m²	1-Way Tipper 33				1-Way Tipper 35			
Model version	290.5C4 + OPT 4G5	290.5C5 + OPT 4G5	290.5C6 + OPT 4G5	290.5C7 + OPT 4G5	290.AC4 + OPT 4G5	290.AC5 + OPT 4G5	290.AC6 + OPT 4G5	290.AC7 + OPT 4G5
Engine	120 MultiJet₂	140 MultiJet₂	160 MultiJet₂	180 MultiJet₂	120 MultiJet₂	140 MultiJet₂	160 MultiJet₂	180 MultiJet₂
Kerb weight (kg)	2313	2313	2328	2328	2313	2313	2328	2328
Payload (kg)	987	987	972	972	1117	1117	1102	1102
GVW (kg)	3300	3300	3300	3300	3430	3430	3430	3430
Top speed (km/h)	148	156	163	170	148	156	163	170
NEDC fuel cons. (l/100 km)	8.4-8.7	8.6-8.9	8.1-8.4	8.1-8.4	8.4-8.7	8.6-8.9	8.1-8.4	8.1-8.4
NEDC CO₂ emissions (g/km)	223-231	225-233	215-223	215-223	223-231	224-233	215-223	215-223
NEDC fuel cons. (l/100 km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC
NEDC CO₂ emissions (g/km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC


Wheelbase 3800 mm Load surface 6.8 m²	1-Way Tipper 33				1-Way Tipper 35			
Model version	290.KC4 + OPT 4G5	290.KC5 + OPT 4G5	290.KC6 + OPT 4G5	290.KC7 + OPT 4G5	290.LC4 + OPT 4G5	290.LC5 + OPT 4G5	290.LC6 + OPT 4G5	290.LC7 + OPT 4G5
Engine	120 MultiJet₂	140 MultiJet₂	160 MultiJet₂	180 MultiJet₂	120 MultiJet₂	140 MultiJet₂	160 MultiJet₂	180 MultiJet₂
Kerb weight (kg)	2338	2338	2353	2353	2338	2338	2353	2353
Payload (kg)	962	962	947	947	1162	1162	1147	1147
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (km/h)	148	156	163	170	148	156	163	170
NEDC fuel cons. (l/100 km)	8.1-8.4	8.1-8.4	8.1-8.4	8.1-8.4	8.1-8.4	8.1-8.4	8.1-8.4	8.1-8.4
NEDC CO₂ emissions (g/km)	212-219	213-220	215-223	215-223	212-219	213-220	215-223	215-223
NEDC fuel cons. (l/100 km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC
NEDC CO₂ emissions (g/km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC

TRUCK 1-WAY TIPPER (OPT. 4G5)

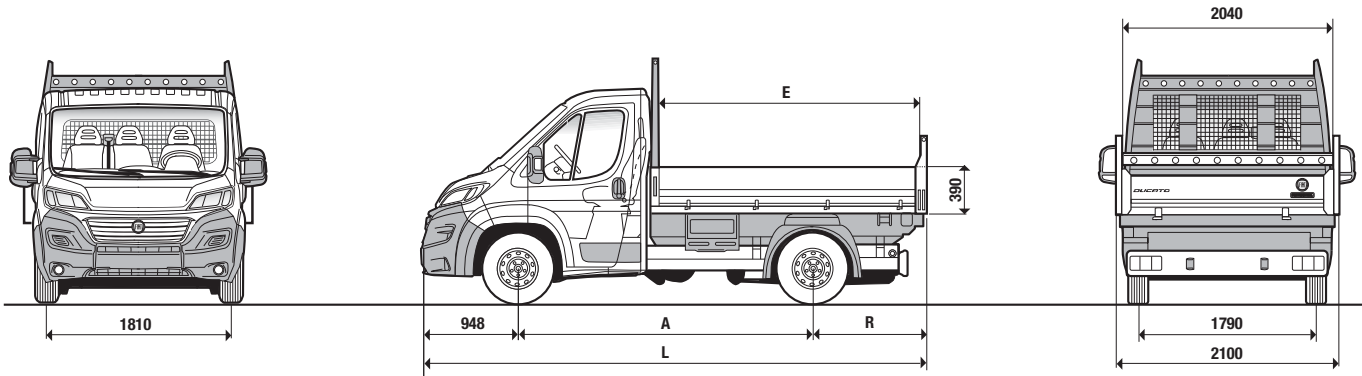

Wheelbase 4035 mm Load surface 7.4 m²	1-Way Tipper 33				1-Way Tipper 35			
Model version	290.6C4 + OPT 4G5	290.6C5 + OPT 4G5	290.6C6 + OPT 4G5	290.6C7 + OPT 4G5	290.BC4 + OPT 4G5	290.BC5 + OPT 4G5	290.BC6 + OPT 4G5	290.BC7 + OPT 4G5
Engine	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	120 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2358	2358	2373	2373	2358	2358	2373	2373
Payload (kg)	942	942	927	927	1142	1142	1127	1127
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Top speed (km/h)	148	156	163	170	148	156	163	170
NEDC fuel cons. (l/100 km)	8.1-8.4	8.1-8.4	8.2-8.4	8.2-8.4	8.1-8.4	8.1-8.4	8.1-8.4	8.1-8.4
NEDC CO ₂ emissions (g/km)	212-220	213-221	216-224	216-224	212-220	213-221	215-224	215-224
NEDC fuel cons. (l/100 km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC
NEDC CO ₂ emissions (g/km) - 9 Speed		TBC	TBC	TBC		TBC	TBC	TBC

MAXI TRUCK 1-WAY TIPPER (OPT. 4G5)

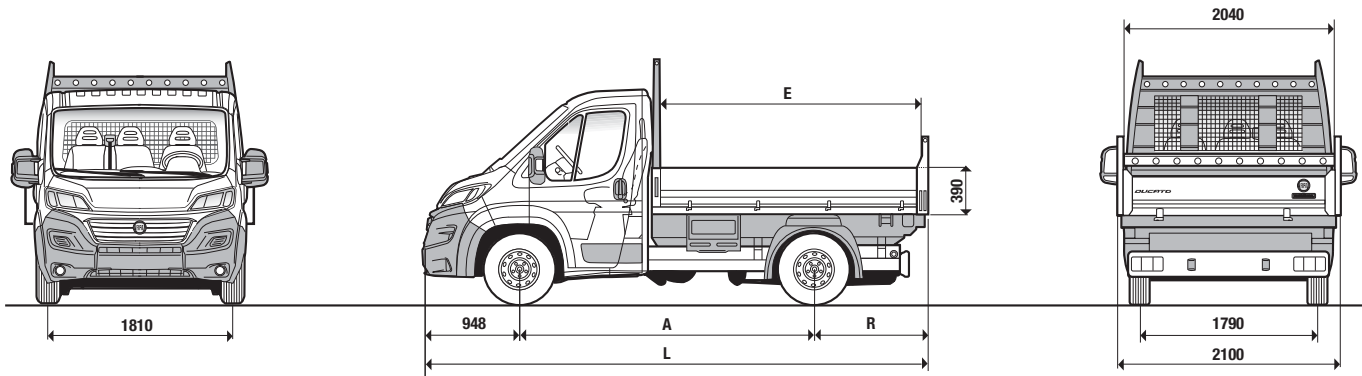

Dimensions mm	1-Way Tipper Maxi 35			1-Way Tipper Maxi 40		
	Single cab	Single cab	Single Cab	Single cab	Single cab	Single Cab
A Wheelbase	3450	3800	4035	3450	3800	4035
L Maximum length	5578	5828	6128	5578	5828	6128
Maximum width	2100	2100	2100	2100	2100	2100
Front track	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790
Front overhang	948	948	948	948	948	948
R Rear overhang	1340	1080	1145	1340	1080	1145
E Flatbed interior length	3075	3325	3625	3075	3325	3625
Flatbed interior width	2040	2040	2040	2040	2040	2040
Side panel height	390	390	390	390	390	390

Wheelbase 3450 mm Load surface 6.3 m²	1-Way Tipper Maxi 35			1-Way Tipper Maxi 40		
Model version	295.AC5 + OPT 4G5	295.AC6 + OPT 4G5	295.AC7 + OPT 4G5	295.FC5 + OPT 4G5 ***	295.FC6 + OPT 4G5	295.FC7 + OPT 4G5
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2393	2408	2408	2408	2408	2408
Payload (kg)	1107	1092	1092	1512	1512	1512
GVW (kg)	3500	3500	3500	3920	3920	3920
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	8.1-8.4	8.2-8.6	8.1-8.5		-	-
NEDC CO ₂ emissions (g/km)	213-221	215-226	215-225		-	-
NEDC fuel cons. (l/100 km) - 9 Speed	9.0-9.4	9.0-9.4	9.0-9.4	-	-	-
NEDC CO ₂ emissions (g/km) - 9 Speed	238-246	238-246	238-246	-	-	-

Wheelbase 3800 mm Load surface 6.8 m²	1-Way Tipper Maxi 35			1-Way Tipper Maxi 40		
Model version	295.LC5 + OPT 4G5	295.LC6 + OPT 4G5	295.LC7 + OPT 4G5	295.PC5 + OPT 4G5 ***	295.PC6 + OPT 4G5	295.PC7 + OPT 4G5
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2418	2433	2433	2433	2433	2433
Payload (kg)	1082	1067	1067	1667	1667	1667
GVW (kg)	3500	3500	3500	4100 **	4100 **	4100 **
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	8.1-8.4	8.2-8.6	8.2-8.6		-	-
NEDC CO ₂ emissions (g/km)	213-221	216-226	216-226		-	-
NEDC fuel cons. (l/100 km) - 9 Speed	9.0-9.4	9.0-9.4	9.0-9.4	-	-	-
NEDC CO ₂ emissions (g/km) - 9 Speed	238-247	238-247	238-247	-	-	-


Wheelbase 4035 mm Load surface 7.4 m²	1-Way Tipper Maxi 35			1-Way Tipper Maxi 40		
Model version	295.BC5 + OPT 4G5	295.BC6 + OPT 4G5	295.BC7 + OPT 4G5	295.GC5 + OPT 4G5 ***	295.GC6 + OPT 4G5	295.GC7 + OPT 4G5
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2438	2453	2453	2453	2453	2453
Payload (kg)	1062	1047	1047	1717	1717	1717
GVW (kg)	3500	3500	3500	4170	4170	4170
Top speed (km/h)	155	157	161	155	157	161
NEDC fuel cons. (l/100 km)	8.1-8.4	8.2-8.6	8.2-8.6		-	-
NEDC CO ₂ emissions (g/km)	215-222	216-226	215-226		-	-
NEDC fuel cons. (l/100 km) - 9 Speed	9.0-9.4	9.0-9.4	9.0-9.4	-	-	-
NEDC CO ₂ emissions (g/km) - 9 Speed	238-247	238-247	238-247	-	-	-

Note: NEDC values for emission and consumption not requested for N2 homologated vehicles

** GVW 4170 kg with 3 seats configuration (opt. 293)

*** AT9 gearbox standard

MAXI CREW CAB TRUCK 1-WAY TIPPER (OPT. 4G5)

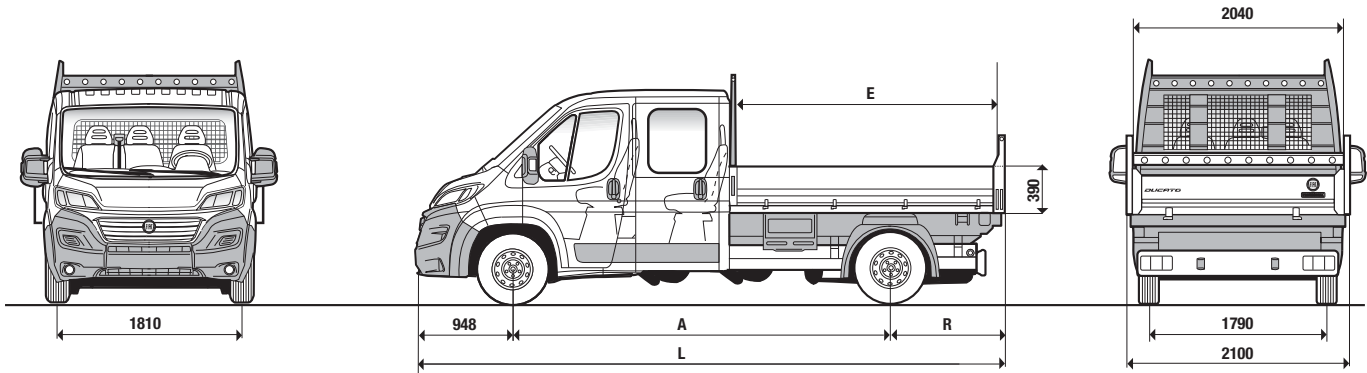

Dimensions mm	1-Way Tipper Maxi 35		1-Way Tipper Maxi 40	
	Crew cab	Crew cab	Crew cab	Crew cab
A Wheelbase	4035	4035 XL	4035	4035 XL
L Maximum length	6123	6448	6123	6448
Maximum width	2100	2100	2100	2100
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
Front overhang	948	948	948	948
R Rear overhang	1245	1695	1245	1695
E Flatbed interior length	2750	3075	2750	3075
Flatbed interior width	2040	2040	2040	2040
Side panel height	390	390	390	390

Wheelbase 4035 mm Load surface 5.6 m²	1-Way Tipper Maxi 35 Crew Cab			1-Way Tipper Maxi 40 Crew Cab		
	295.BD5 + OPT 4G5	295.BD6 + OPT 4G5	295.BD7 + OPT 4G5	295.GD5 + OPT 4G5 ***	295.GD6 + OPT 4G5	295.GD7 + OPT 4G5
Model version						
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2548	2563	2563	2563	2563	2563
Payload (kg)	952	937	937	1357	1357	1357
GVW (kg)	3500	3500	3500	3920	3920	3920
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	8.2-8.5	8.3-8.7	8.3-8.7	-	-	-
NEDC CO ₂ emissions (g/km)	216-225	219-230	218-230	-	-	-
NEDC fuel cons. (l/100 km) - 9 Speed	9.1-9.5	9.1-9.5	9.1-9.5	-	-	-
NEDC CO ₂ emissions (g/km) - 9 Speed	240-250	240-250	240-250	-	-	-

Wheelbase 4035 mm XL Load surface 6.3 m²	1-Way Tipper Maxi 35 Crew Cab			1-Way Tipper Maxi 40 Crew Cab		
	295.CD5 + OPT 4G5	295.CD6 + OPT 4G5	295.CD7 + OPT 4G5	295.HD5 + OPT 4G5 ***	295.HD6 + OPT 4G5	295.HD7 + OPT 4G5
Model version						
Engine	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂	140 MultiJet ₂	160 MultiJet ₂	180 MultiJet ₂
Kerb weight (kg)	2593	2608	2608	2608	2608	2608
Payload (kg)	907	892	892	1542	1542	1542
GVW (kg)	3500	3500	3500	4150	4150	4150
Top speed (km/h)	156	161	161	90	90	90
NEDC fuel cons. (l/100 km)	8.2-8.6	8.3-8.8	8.3-8.8	-	-	-
NEDC CO ₂ emissions (g/km)	216-225	219-231	219-231	-	-	-
NEDC fuel cons. (l/100 km) - 9 Speed	9.2-9.6	9.2-9.6	9.2-9.6	-	-	-
NEDC CO ₂ emissions (g/km) - 9 Speed	241-251	241-251	241-251	-	-	-

Note: NEDC values for emission and consumption not requested for N2 homologated vehicles
*** AT9 gearbox standard

SERVICES

VEHICLE WARRANTY

With your new Fiat Professional commercial vehicle comes a 24-month warranty starting from the delivery date and without mileage limits. The warranty covers factory defects which will be repaired free of charge and using original or reconditioned parts. Operations under warranty are carried out by Dealerships and include:

- repair or replacement of the faulty part;
- labour for replacement or repair operations;
- supply of consumables needed to carry out the repairs under Warranty.

During the period of Warranty you can benefit of the advantages of roadside assistance.

Warranty on paint work

The vehicle is covered against factory defects regarding paint work for 36 months starting from the delivery date. The warranty includes the complete or partial repainting of the vehicle, in order to remove the fault determined according to the Manufacturer's standard conditions.

Anti-perforation warranty

Structural elements of the body are covered against perforation due to corrosion, as long as this takes place from the inside outwards. The warranty includes the repair and/or replacement of any original structural element of the body perforated by corrosion, and is valid for a period of 8 years starting from the delivery date. We recommend that you check the specific coverage conditions in your warranty booklet.

CIAO FIAT CUSTOMER SERVICE

You can call Fiat Professional free of charge on 0080034280000* from anywhere in Europe. We are at your disposal to provide roadside assistance 365 days a year, 24 hours a day. If you contact the Fiat Customer Service, you can also request information about our models, services and Dealership Network. You can also book a test drive of any vehicle you like. Whatever you need, we're here for you.

* Check the cost with your operator beforehand when calling from abroad or from a mobile network.



SPECIAL SALES PROGRAMMES

Customised mobility solutions? Autonomy is aimed at people with reduced motor abilities and proposes specific trim levels for passenger transport vehicles, roadside assistance and financial services. It also offers comprehensive assistance in obtaining a special driving licence from Mobility Centres. Call the free-phone number 800-838333 to obtain full and complete information based on your needs.



MY FIAT PROFESSIONAL

Take care of your Fiat Professional with a click! Register on my Fiat Professional. You'll get personalised advice, dedicated tools and exclusive promotions. Go to my.fiatprofessional.com.

my Fiat Professional



FINANCIAL AND INSURANCE SERVICES*

Find out how to get your new Ducato with FCA BANK's innovative finance solutions. Whether you're a retail customer, a self-employed professional or an entrepreneur, FCA BANK offers you the best and most flexible financial instruments to assist your imminent purchase of a new Ducato and drive in complete freedom. With FCA BANK you can combine high-added-value services tailor-made to meet your every requirement. For more information, visit www.fcabank.it

However you choose to experience mobility, FCA BANK satisfies your needs with financial and leasing packages combined with exclusive services.

Instalment The classic instalment finance that allows you to spread the payment of all or part of your new vehicle for a period ranging from 12 to 72 months or part of your used vehicle for a period ranging from 12 to 60 months.

Leasing If you are a freelancer, self-employed or an entrepreneur, this solution allows you to use the vehicle without tying up capital. You can choose the duration of the contract (up to 60 months) as well as the down payment sum, and enjoy a flexible final cash surrender value.

In addition to financing plans, FCA BANK offers a complete range of services designed to protect you from unexpected events: **indelible marking** on key vehicle components as a maximum deterrent against theft, the special **Fire&Theft, Collision** (protection against collisions with other vehicles), **Kasko (fully comprehensive insurance)** and **Prestito Protetto** protected loan (e.g. instalment repayment if you lose your job) policies and three types of **StradaFacendo** Warranty with different coverage for keeping your vehicle in shape.

* Within the limits laid down by policy conditions and save the exclusions indicated. For more information, call the Contact Centre 199.818.203 (from Monday to Friday from 9 a.m. to 5 p.m.) or visit the www.fcabank.it website.



HIRE SERVICES

Long term hire is the perfect solution for companies and tradespeople that want to exploit and enjoy all the advantages of their new vehicle, without its ownership and the related obligations. Long-term hire offers a number of tangible advantages: • **No initial investment** to purchase the vehicle • **No unexpected costs**, the fixed rate is defined according to the duration of the contract, the estimated mileage and any additional services. Standard and non-standard maintenance costs are included • **No risk of depreciation**, at the end of the contract, the vehicle is simple returned, thus eliminating the worry of selling a used vehicle • **No waste of time**, mobility is always guaranteed.

For information contact your Dealership or visit the www.leasys.com website or call the free-phone number 800334422



MOPAR, VEHICLE PROTECTION

MOPAR, VEHICLE PROTECTION offers a number of service agreements specially designed to ensure all its customers the pleasure of driving their cars worry-free and without anyunwelcome surprises. Our product portfolio consists of a wide and flexible range of extended warranties and service plans authorised by Alfa Romeo. Every agreement adapts to the customer's driving requirements, with different solutions that vary in duration and mileage. Only with Mopar, Vehicle Protection can you be sure that all servicing will be performed by highly qualified and specialised professionals at authorised Fiat Professional repair workshops throughout Europe, where only genuine spare parts will be used. Choose the Service Agreement that best fits your driving requirements.

MAXIMUM CARE: ZERO WORRIES WHEREVER YOU ARE

Make sure you travel safely with the extended warranty covering the mechanical and electrical components of your vehicle, in addition to the manufacturer's contractual 2-year warranty valid in Italy and abroad. The widest offer that fits the customer's needs, with solutions varying in terms of duration and mileage, with up to 200,000 km and 3 years in addition to the contractual 2-year warranty.

EASY CARE: MAINTENANCE AT BLOCKED PRICES

The scheduled maintenance plan designed to ensure you have a fixed price on the servicing necessary to take care of your vehicle so it is always kept in perfect running order. Up to 5 years of coverage, with varying solutions in terms of duration and mileage. Lengthen the lifetime of your vehicle by making sure you carry out all the scheduled servicing necessary to ensure the best performance, as always.

* The Mopar, Vehicle Protection assistance contracts can be signed directly when you purchase a new vehicle and be included (if you like) in the FCA Bank financial offer. EASY CARE can be signed at any time before the first scheduled servicing, while MAXIMUM CARE can be signed within 24 months from the date of vehicle registration.

